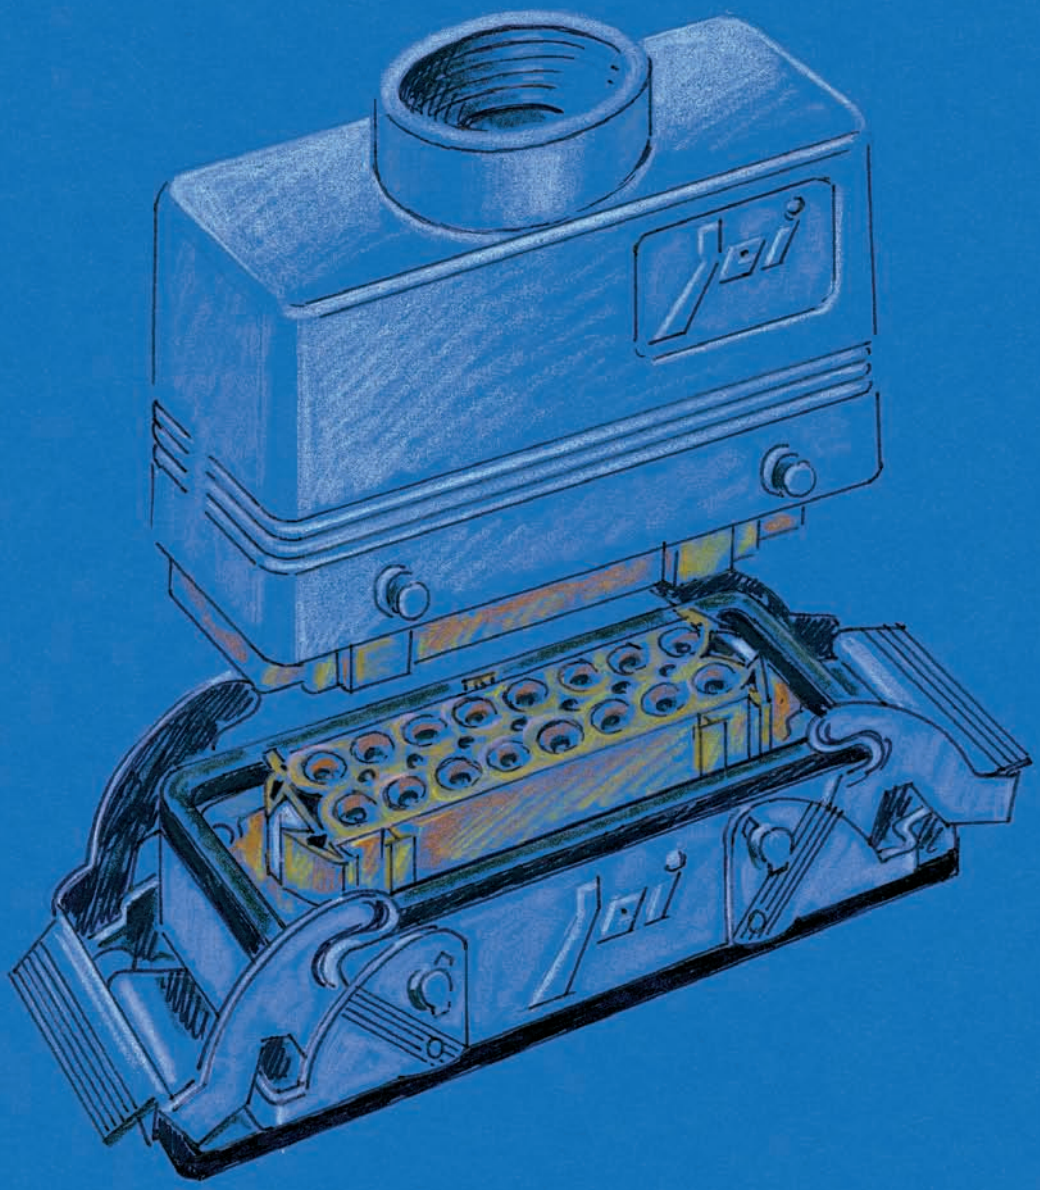

inserts: page

CDD	24	poles + ⏚	59
CQE	10	poles + ⏚	80
CSH	6	poles + ⏚	88
CCE	6	poles + ⏚	94
CNE, CSE, JCNE, JCSE	6	poles + ⏚	95 and 106
CSS	6	poles + ⏚	118
CT, CTE, CTSE *)	6	poles + ⏚	126 and 130
MIXO	2	modules	156÷195

insert centre distance:
44 x 27 mm

bulkhead mounting housings
with single lever with galvanised steel lever

lever in galvanized steel

bulkhead mounting housings
with single lever with galvanised steel lever

lever in galvanized steel

description	part no.	part no.
with lever, size “44.27”	**JCVI 06 L**	
with lever and plastic cover, size “44.27”		**JCVI 06 LP**

***)** can be used only in bulkhead mounting housings

panel cut-out for bulkhead mounting housings in mm



type	A	B
JCVI 06	52	70

dimensions in mm

JCVI L

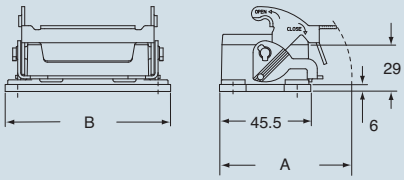

type	A	B
JCVI 06 L	66	82.5

dimensions in mm

JCVI LP

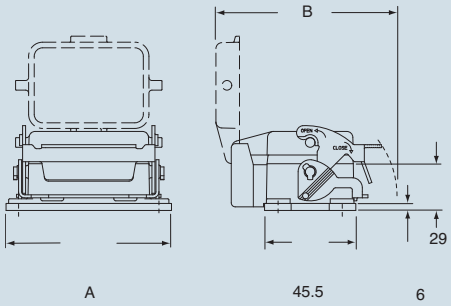

type	A	B
JCVI 06 LP	82.5	89

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

EN 60529 IP66 IEC 60529

dimensions shown are not binding
and may be changed without notice

inserts: page

CDD	24	poles + ⏚	59
CQE	10	poles + ⏚	80
CSH	6	poles + ⏚	88
CCE	6	poles + ⏚	94
CNE, CSE, JCNE, JCSE	6	poles + ⏚	95 and 106
CSS	6	poles + ⏚	118
MIXO	2	modules	156÷195

insert centre distance:
44 x 27 mm

surface mounting housings
with single lever with galvanised steel lever

lever in galvanized steel

surface mounting housings
with single lever with galvanised steel lever

lever in galvanized steel

description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with lever, size “44.27”	**JCVP 06 L**	16	**JMVP 06 L20**	20				
with lever and cover, size “44.27”					**JCVP 06 LP**	16	**JMVP 06 LP20**	20

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

dimensions in mm

JCVP L - JMVP L

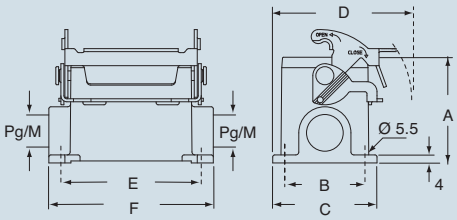

type	A	B	C	D	E	F
JCVP - JMVP	53	40	52	70	70	82

dimensions in mm

JCVP 06 LP - JMVP LP

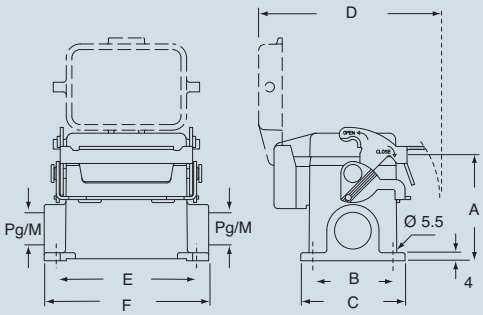

type	A	B	C	D	E	F
JCVP - JMVP	53	40	52	91	70	82

EN 60529 IP66 IEC 60529

dimensions shown are not binding
and may be changed without notice

inserts: page

CDD	42	poles + ⏚	61
CQE	18	poles + ⏚	81
CSH	10	poles + ⏚	89
CCE	10	poles + ⏚	96
CNE, CSE, JCNE, JCSE	10	poles + ⏚	97 and 107
CSS	10	poles + ⏚	119
CT, CTE, CTSE *)	10	poles + ⏚	127 and 131
CMSE	3+2 (aux)	poles + ⏚	135
CMCE	3+2 (aux)	poles + ⏚	134
CX	8/24	poles + ⏚	151
MIXO	3	modules	156÷195

insert centre distance:
57 x 27 mm

bulkhead mounting housings with single lever with galvanised steel lever

lever in galvanized steel

bulkhead mounting housings with 2 levers and galvanised steel lever

lever in galvanized steel

description	part no.	part no.
with lever, size “57.27”	**JCVI 10 L**	
with lever and plastic cover, size “57.27”	**JCVI 10 LP**	
with levers, size “57.27”		**JCVI 10**

***)** can be used only in bulkhead mounting housings

panel cut-out for bulkhead mounting housings in mm



type	A	B
JCVI 10	65	83

dimensions in mm

JCVI L

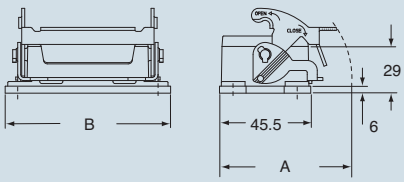

JCVI LP

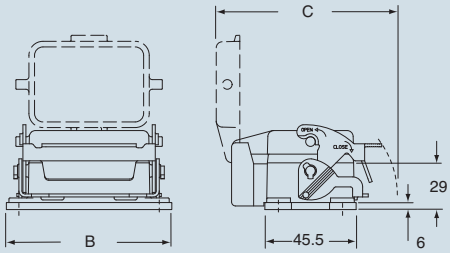

type	A	B	C
JCVI 10 L	70	95.5	-
JCVI 10 LP	-	95.5	94

dimensions in mm

JCVI

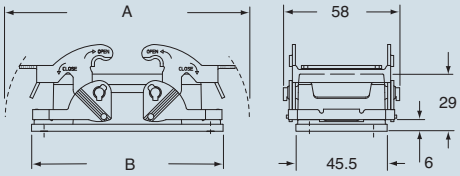

type	A	B
JCVI 10	122	95.5

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

EN 60529 IP66 IEC 60529

dimensions shown are not binding and may be changed without notice

inserts: page

CDD	42	poles + ⏚	61
CQE	18	poles + ⏚	81
CSH	10	poles + ⏚	89
CCE	10	poles + ⏚	96
CNE, CSE, JCNE, JCSE	10	poles + ⏚	97 and 107
CSS	10	poles + ⏚	119
CMSE	3+2 (aux)	poles + ⏚	135
CMCE	3+2 (aux)	poles + ⏚	134
CX	8/24	poles + ⏚	135
MIXO	3	modules	156÷195

insert centre distance:
57 x 27 mm

surface mounting housings with single lever with galvanised steel lever

lever in galvanized steel

bulkhead mounting housings with 2 levers and galvanised steel lever

lever in galvanized steel

description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with lever/s, size “57.27”	**JCVP 10 L**	16	**JMVP 10 L20**	20				
with levers, size “57.27”					**JCVP 10**	16	**JMVP 10.20**	20

dimensions in mm

JCVP L - JMVP L

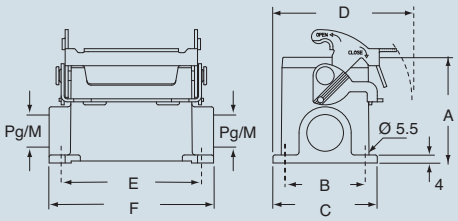

type	A	B	C	D	E	F
JCVP - JMVP	57	40	52	73	82	93.5

dimensions in mm

JCVP - JMVP

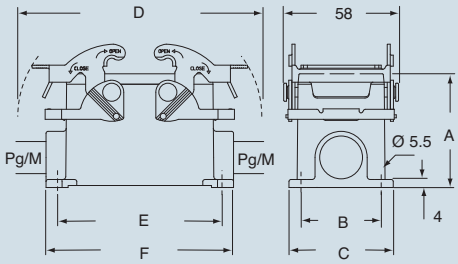

type	A	B	C	D	E	F
JCVP - JMVP	57	40	52	122	82	93.5

EN 60529 IP66 IEC 60529

dimensions shown are not binding and may be changed without notice

inserts: page

CD	40	poles + ⏚	49
CT, CTS (10A)	40	poles + ⏚	56
CDD	72	poles + ⏚	62
CQE	32	poles + ⏚	82
CSH	16	poles + ⏚	90
CCE	16	poles + ⏚	98
CNE, CSE, JCNE, JCSE	16	poles + ⏚	99 and 108
CSS	16	poles + ⏚	120
CT, CTE, CTSE (16A) ***)**	16	poles + ⏚	128 and 132
CMSE	6+2 (aux)	poles + ⏚	137
CMCE	6+2 (aux)	poles + ⏚	136
CP	6	poles + ⏚	149
CX	6/36 and 12/2	poles + ⏚	152÷153
CX	4/0 and 4/2	poles + ⏚	154
MIXO	4	modules	156÷195

insert centre distance: **77.5 x 27 mm**

bulkhead mounting housings with single lever with galvanised steel lever

lever in galvanized steel

bulkhead mounting housings with 2 levers and galvanised steel lever

lever in galvanized steel

description	part no.	part no.
with lever, size “77.27”	**JCVI 16 L**	
with lever and plastic cover, size “77.27”	**JCVI 16 LP**	
with levers, size “77.27”		**JCVI 16**

***)** can be used only in bulkhead mounting housings

panel cut-out for bulkhead mounting housings in mm



type	A	B
JCVI 16	86	103

dimensions in mm

JCVI L

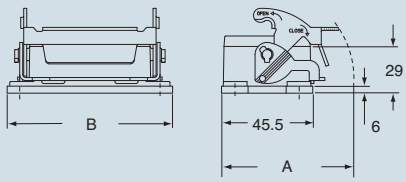

JCVI LP

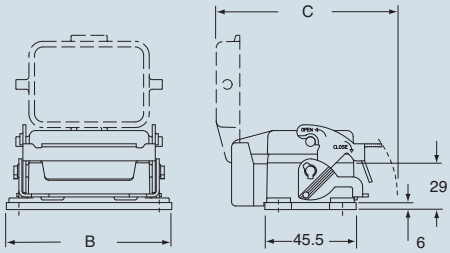

type	A	B	C
JCVI 16 L	70	115.5	-
JCVI 16 LP	-	115.5	94

dimensions in mm

JCVI

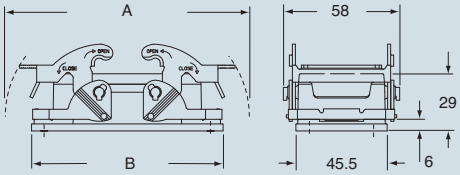

type	A	B
JCVI 16	142.5	115.5

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

EN 60529 IP66 IEC 60529

dimensions shown are not binding and may be changed without notice

inserts: page

CD	40	poles + ⏚	49
CDD	72	poles + ⏚	62
CQE	32	poles + ⏚	82
CSH	16	poles + ⏚	90
CCE	16	poles + ⏚	98
CNE, CSE, JCNE, JCSE	16	poles + ⏚	99 and 108
CSS	16	poles + ⏚	120
CMSE	6+2 (aux)	poles + ⏚	1137
CMCE	6+2 (aux)	poles + ⏚	136
CP	6	poles + ⏚	149
CX	6/36 and 12/2	poles + ⏚	152÷153
CX	4/0 and 4/2	poles + ⏚	154
MIXO	4	modules	156÷195

insert centre distance: **77.5 x 27 mm**

surface mounting housings with single lever with galvanised steel lever

lever in galvanized steel

surface mounting housing with 2 levers and galvanised steel lever

lever in galvanized steel

description	part no.	entry Pg	part no.	entry M	part no.	entry Pg	part no.	entry M
with lever, size “77.27”	**JCVP 16 L**	21	**JMVP 16 L25**	25				
with levers, size “77.27”					**JCVP 16**	21	**JMVP 16.25**	25

dimensions in mm

JCVP L - JMVP L

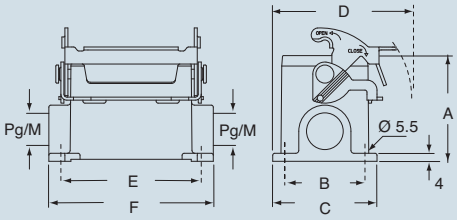

type	A	B	C	D	E	F
JCVP L - JMVP L	63	45	57	75.5	105	117

dimensions in mm

JCVP - JMVP

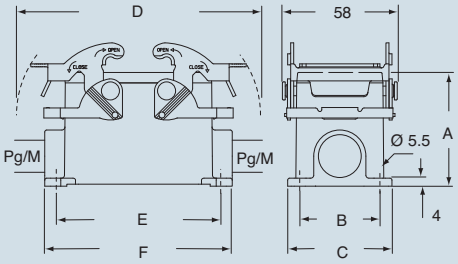

type	A	B	C	D	E	F
JCVP - JMVP	63	45	57	142.5	105	117

EN 60529 IP66 IEC 60529

dimensions shown are not binding and may be changed without notice

inserts: page

CD	64	poles + ⏚	51
CT, CTS (10A)	64	poles + ⏚	57
CDD	108	poles + ⏚	64
CQE	46	poles + ⏚	83
CSH	24	poles + ⏚	91
CCE	24	poles + ⏚	100
CNE, CSE, JCNE, JCSE	24	poles + ⏚	101 and 109
CSS	24	poles + ⏚	121
CT, CTE, CTSE (16A) *)	24	poles + ⏚	129 and 133
CMSE	10+2 (aux)	poles + ⏚	139
CMCE	10+2 (aux)	poles + ⏚	138
CX	4/8	poles + ⏚	155
MIXO	6	modules	156÷195

insert centre distance:
104 x 27 mm

bulkhead mounting housings with single lever with galvanised steel lever

lever in galvanized steel

bulkhead mounting housings with 2 levers and galvanised steel lever

lever in galvanized steel

description	part no.	part no.
with lever, size “104.27”	**JCVI 24 L**	
with lever and plastic cover, size “104.27”	**JCVI 24 LP**	
with levers, size “104.27”		**JCVI 24**

*) can be used only in bulkhead mounting housings

panel cut-out for bulkhead mounting housings in mm



type	A	B
JCVI 24	112	130

dimensions in mm

JCVI L

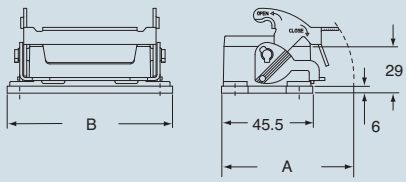

JCVI LP

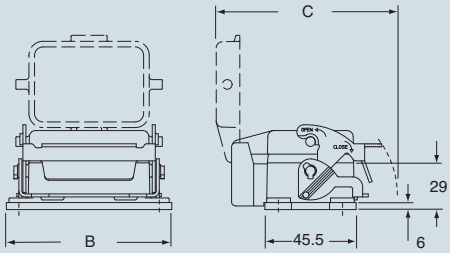

type	A	B	C
JCVI 24 L	70	142.5	-
JCVI 24 LP	-	142.5	94

dimensions in mm

JCVI

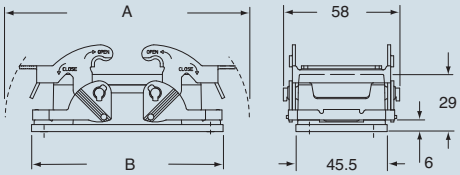

type	A	B
JCVI 24	169	142.5

NB: the enclosures ensure IP66 protection (or IP65 for cover versions) rating when mated and locked with the closing levers.

EN 60529 IP66 IEC 60529

dimensions shown are not binding and may be changed without notice

inserts: page

CD	64	poles + ⏚	51
CDD	108	poles + ⏚	64
CQE	46	poles + ⏚	83
CSH	24	poles + ⏚	91
CCE	24	poles + ⏚	100
CNE, CSE, JCNE, JCSE	24	poles + ⏚	101 and 109
CSS	24	poles + ⏚	121
CMSE	10+2 (aux)	poles + ⏚	139
CMCE	10+2 (aux)	poles + ⏚	138
CX	4/8	poles + ⏚	155
MIXO	6	modules	156÷195

insert centre distance:
104 x 27 mm

surface mounting housings
with single lever with galvanised steel lever

lever in galvanized steel

bulkhead mounting housings
with 2 levers and galvanised steel lever

lever in galvanized steel

description	surface mounting housings: part no.	entry Pg	surface mounting housings: part no.	entry M	bulkhead mounting housings: part no.	entry Pg	bulkhead mounting housings: part no.	entry M
with lever, size “104.27”	**JCVP 24 L**	21	**JMVP 24 L25**	25				
with levers, size “104.27”					**JCVP 24**	21	**JMVP 24.25**	25

dimensions in mm

JCVP L

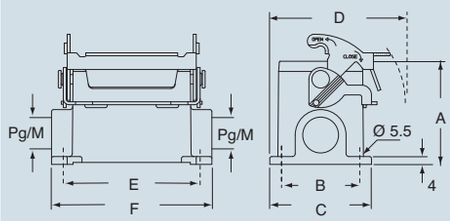

type	A	B	C	D	E	F
JCVP L - JMVP L	63	45	57	75.5	132	144

dimensions in mm

JCVP

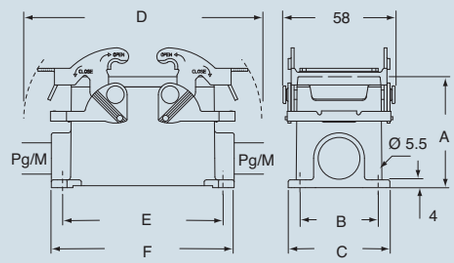

type	A	B	C	D	E	F
JCVP - JMVP	63	45	57	169	132	144

EN 60529 IP66 IEC 60529

dimensions shown are not binding
and may be changed without notice