

Part number

CMEM 16



Male insert, CME series, screw terminal connection, 16 + 2 poles + PE, 16 A 400/690 V 6 kV 3 / 16 A 500 V 6 kV 3, size "104.27"

Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CME	Other materials	Contacts: copper alloy
Connection type	Screw terminal connection	Colour	RAL 7032 grey
Gender	Male	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	16 poles + 	China RoHs - EFUP	50
Auxiliary poles	2 poles	REACH SVHC substances	Yes
Size	Size "104.27"	Lead	Lead
Technical data		SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Current	16 A	Approvals / Standards	
Voltage	400 - 690 V	Reference standard	EN 61984:2009-06
Rated impulse withstand voltage	6 kV	Certifications	CSA, CQC, DNV, BV, EAC
Pollution degree	3	UL	ECBT2
Rated voltage according to UL/CSA	600V	cUL	ECBT8
Wire cross-section	0,75 mm ² - 2,50 mm ²	General ordering information	
AWG size	18 - 14	EAN13 code	8015747140584
Contact type	Turned silver plated	ETIM 7.0	EC000438
IP degree of protection	IP20 without enclosure, IP65/IP66 with enclosure	Packaging Information	
Further technical details		Sub-packaging length	113,00 mm
Characteristics according to EN 61984	16A 400/690V 6kV 3 (aux: 16A 500V 6kV 3); 16A 1000V 8kV 2 (power contacts only)	Sub-packaging height	36,00 mm
Mating cycles	≥ 500	Sub-packaging width	180,00 mm
Insulation resistance	≥ 10 GΩ	Sub-packaging weight	0,50 kg
Weight	100,00 g	Sub-packaging volume	0,73 dm ³
Operating temperature range (min, max)	-40 °C ... +125 °C	Sub-packaging description	Carton tray
UL 94 flammability rating	V-0	Sub-packaging quantity	5 Pcs
		Sub-packaging EAN barcode	8015747167604


Part number

CMEM 16




Catalogue drawings


CMEM 16

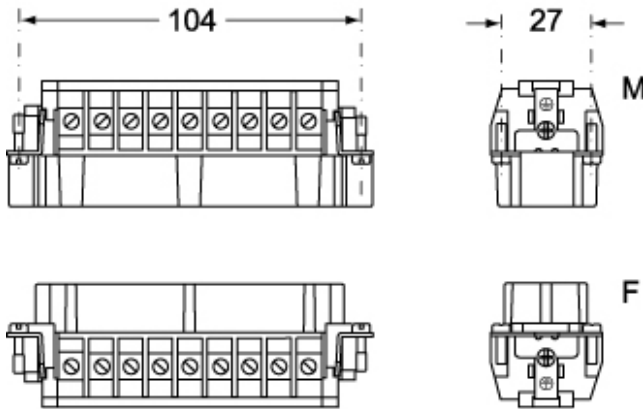

CMEF 16

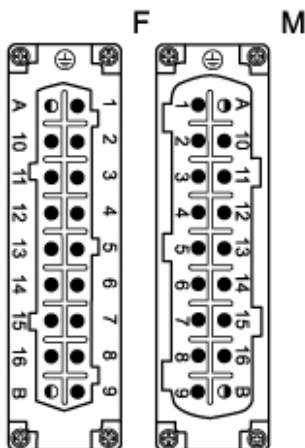

Catalogue drawings

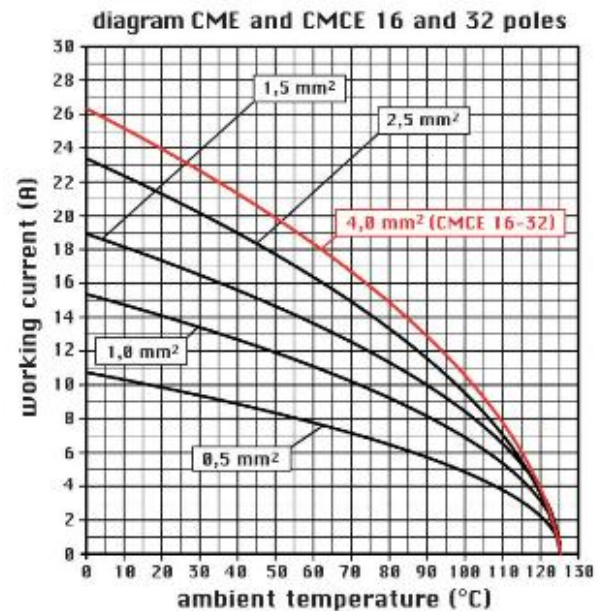

Notes

CMEF/M 16 inserts:

- inserts with plate, for section conductors:
0.75 - 2.5 mm² - AWG 18 - 14
- conductors stripping length: 7 mm
- terminal screw torque: 0.5 Nm (4.4 lb.in), for more
- characteristics according to EN 61984:
16A 400/690V 6kV 3
16A 1000V 8kV 2
16A 720/1250V 8kV 2
- auxiliary contacts: 16A 500V 6kV 3
- UL, CSA, CCC, GOST certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: > 10 GOhm
- ambient temperature limit: -40 °C ... +125 °C

- are made of self-extinguishing thermoplastic resin UL 94 V0
- mechanical life: > 500 cycles
- contact resistance: < 1 mOhm
- inserts and enclosures for applications with temperatures up to 180 °C, available on request;
- enclosures: size 104.27:
insulated 830V
T-TYPE IP65 insulating
W-TYPE aggressive environments
- panel supports: COB

Dimensions shown in mm are not binding and may be changed without notice.

CME....: for non-prepared conductors

- inserts with plate, for section conductors:

0.5 - 4 mm² - AWG 20 - 12

- conductors stripping length: 7 mm

- terminal screw torque: 0.5 Nm



CMEX: or bush terminal conductors

- inserts without plate, for section conductors:

0.25 - 2.5 mm² - AWG 24 - 14

- conductors stripping length: 7 mm

- terminal screw torque: 0.5 Nm

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.