

Part number

# CX 03 MP



Modular insert, Mixo series, for pneumatic contacts, 1 module, with 3 seats for tube diameter 3 - 4 - 6 mm


Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate (PC)
Series	Mixo	Colour	RAL 5015 blue
Connection type	Pneumatic	RoHs conformity	Compliant
N. of poles	3 poles	China RoHs - EFUP	E
Size	1 module	REACH SVHC substances	No
Specification	With 3 seats for tube diameter 3 - 4 - 6 mm	General ordering information	
Further technical details		EAN13 code	8015747182140
Mating cycles	≥ 500 / ≥ 10.000 with HNM frames and enclosures	eCl@ss 8.1	27440205
Insulation resistance	≥ 10 GΩ	ETIM 7.0	EC000438
Weight	6,50 g	Packaging Information	
Operating temperature range (min, max)	-40°C...+80°C	Packaging length	180,00 mm
UL 94 flammability rating	V-0	Packaging height	120,00 mm
		Packaging width	155,00 mm
		Packaging weight	0,58 kg
		Packaging volume	3,35 dm³
		Packaging description	Carton box
		Packaging quantity	60 Pcs
		Packaging EAN code	8015747182157
		Sub-packaging length	35,00 mm
		Sub-packaging height	40,00 mm
		Sub-packaging width	155,00 mm
		Sub-packaging weight	0,10 kg
		Sub-packaging volume	0,22 dm³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	10 Pcs
		Sub-packaging EAN barcode	8015747182164

Part number

# CX 03 MP



## Catalogue drawings

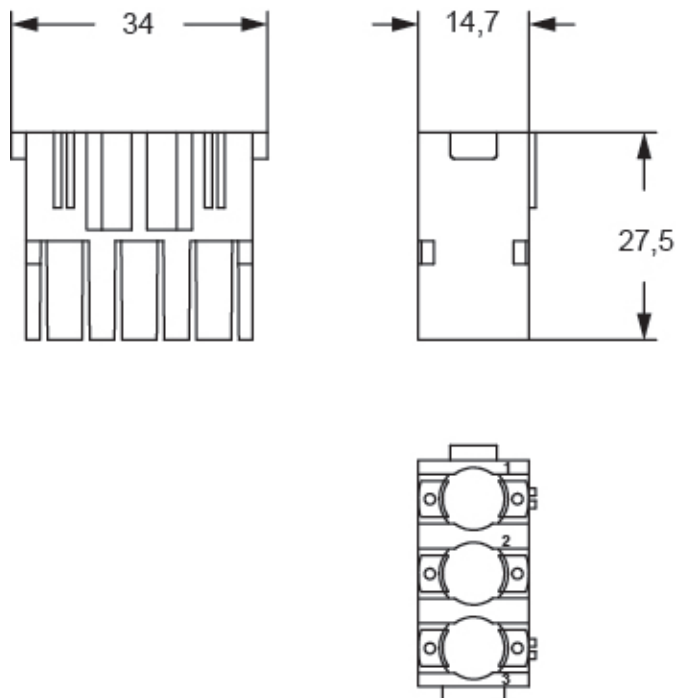

## Notes

### Warnings:

1) CRM/F CX code pins and guides must be used for pneumatic contacts modules. These pins also provide coding if pneumatic contacts modules are used exclusively.

without notice.

### Use of units for pneumatic contacts

- pneumatic contacts for pressure values up to 10 bar, for use with clean and dry compressed air
- possibility of using tubes with different diameters in the same modular unit
- female contacts with or without closing valve
- working temperature range - 40 °C ÷ + 80 °C
- use of tubes with Ø 3 - 4 and 6 mm, and possible replacement of tubes with assembled units. Tube with

- ID inner Ø (push-over attachment of tubes over barbed straight contacts):

CX xx MPF/M, CX xx MPV

- OD outer Ø (push-in attachment of tubes to the quick-fitting contacts):

CX xx MPQF/M, CX xx MPAV, CX xx MPAF/M, CX xx MPQV

Dimensions shown in mm are not binding and may be changed