

Part number

CX 05 SHM



Male modular insert, Mixo series, SQUICH® spring terminal connection without tools, 5 poles, 1 module, 16 A 400 V 6 kV 3


Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate
Series	Mixo	Colour	RAL 7032 grey
Connection type	SQUICH® spring terminal connection without tools	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Gender	Male	China RoHs - EFUP	50
N. of poles	5 poles	REACH SVHC substances	Yes
Size	1 module	Lead	Lead
Technical data		SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Current	16 A	Approvals / Standards	
Voltage	400 V	Certifications	DNV, BV, EAC, CQC
Rated impulse withstand voltage	6 kV	UL	ECBT2, PVVA2
Pollution degree	3	cUL	ECBT8, PVVA8
Rated voltage according to UL/CSA	600 V	General ordering information	
Wire cross-section	0,14 mm² - 2,50 mm²	EAN13 code	8015747263634
AWG size	26 - 14	eCl@ss 8.1	27440205
Contact type	Turned silver plated	ETIM 7.0	EC000438
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Packaging Information	
Further technical details		Packaging length	180,00 mm
Characteristics according to EN 61984	16 A 400 V 6 kV 3	Packaging height	120,00 mm
Mating cycles	≥ 500	Packaging width	155,00 mm
Insulation resistance	≥ 10 GΩ	Packaging weight	1,28 kg
Contact resistance	≤ 3 mΩ	Packaging volume	3,35 dm³
Weight	18,50 g	Packaging description	Carton box
Operating temperature range (min, max)	-40 °C ... +125 °C	Packaging quantity	60 Pcs
Conductors stripping length	9...11 mm	Packaging EAN code	8015747263641
UL 94 flammability rating	UL 94V-0	Sub-packaging length	155,00 mm
		Sub-packaging height	48,00 mm
		Sub-packaging width	35,00 mm
		Sub-packaging weight	0,21 kg
		Sub-packaging volume	0,26 dm³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	10 Pcs
		Sub-packaging EAN barcode	8015747263658

Part number


CX 05 SHM



Catalogue drawings

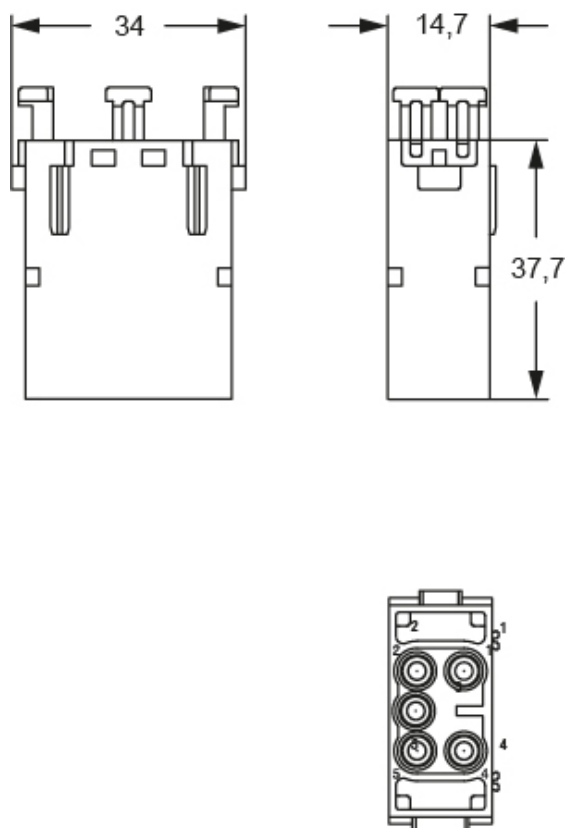

Derating curves

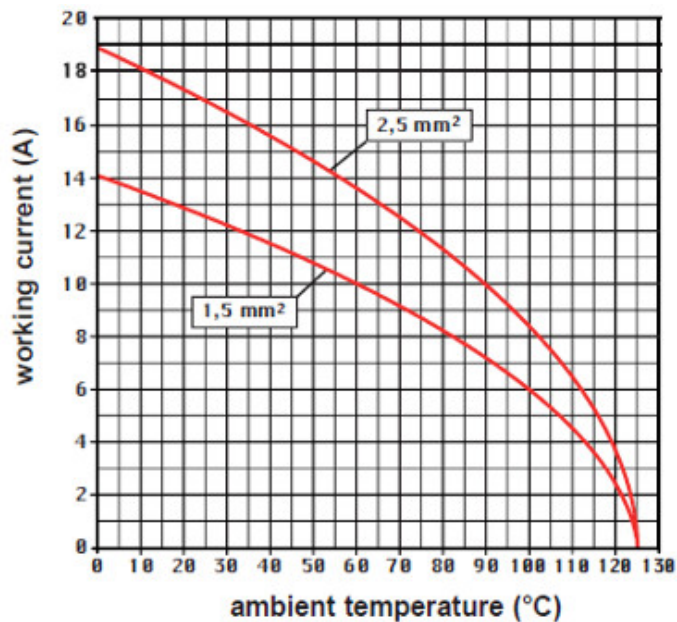

Notes

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

