

Part number

# MKAX AP20



Angled Bulkhead mounting housing, CKA series, with 1 lever, M20 cable entry, size "21.21", bulkhead hole closed

| Product description                    |                                           | Material properties          |                        |
|----------------------------------------|-------------------------------------------|------------------------------|------------------------|
| Product type                           | Angled bulkhead mounting housing          | Main material                | Zinc die-cast          |
| Series                                 | CKA                                       | Other materials              | Lever: Stainless steel |
| Closing type                           | With 1 lever                              | Colour                       | RAL 7040 grey          |
| Size                                   | Size "21.21"                              | RoHs conformity              | Compliant              |
| Cable entry                            | With cable entry<br>M20                   | China RoHs - EFUP            | E                      |
| Specification                          | Bulkhead hole closed                      | REACH SVHC substances        | No                     |
| Technical data                         |                                           | Approvals / Standards        |                        |
| IP degree of protection                | IP44 - IP66 / IP67 / IP69 with CKR 65 (D) | UL                           | ECBT2                  |
| Further technical details              |                                           | cUL                          | ECBT8                  |
| Further technical details              |                                           | General ordering information |                        |
| Weight                                 | 71,00 g                                   | EAN13 code                   | 8015747056885          |
| Operating temperature range (min, max) | -40°C...+125°C                            | eCl@ss 8.1                   | 27440202               |
|                                        |                                           | ETIM 7.0                     | EC000437               |
| Packaging Information                  |                                           |                              |                        |
| Sub-packaging length                   |                                           | 210,00 mm                    |                        |
| Sub-packaging height                   |                                           | 40,00 mm                     |                        |
| Sub-packaging width                    |                                           | 175,00 mm                    |                        |
| Sub-packaging weight                   |                                           | 0,71 kg                      |                        |
| Sub-packaging volume                   |                                           | 1,47 dm³                     |                        |
| Sub-packaging description              |                                           | Carton box                   |                        |
| Sub-packaging quantity                 |                                           | 10 Pcs                       |                        |
| Sub-packaging EAN barcode              |                                           | 8015747056892                |                        |



Part number

# MKAX AP20




Catalogue drawings



CKA IA




Catalogue drawings

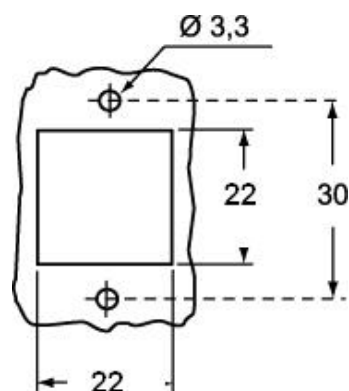

CKAX IA



CKA IAPS (CKA APS) MKA - IAP (MKA AP)

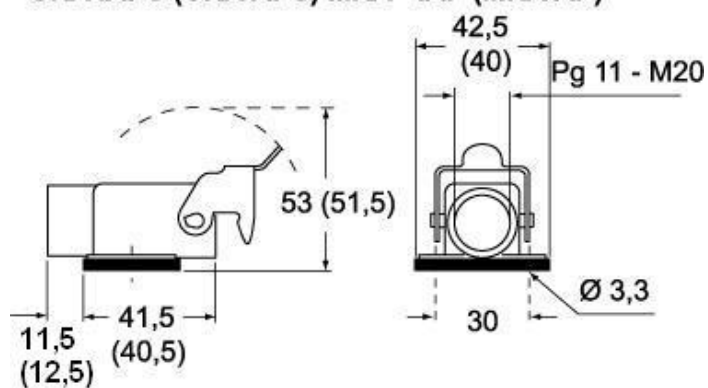

CKAX IAPS (CKAX APS) - MKAX IAP (MKAX AP)

