

Part number

CCFA 0.3



Female crimp contact, CC series, 16 A, turned silver plated, wire cross section 0,14 - 0,37 mm², AWG 26 - 22


Product description		Material properties	
Product type	Crimp contact	Main material	Copper alloy
Series	CC		Compliant with exemption
Gender	Female	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Technical data		China RoHs - EFUP	50
Current	16 A	REACH SVHC substances	Yes
Wire cross-section	0,14 mm ² - 0,37 mm ²		Lead
AWG size	26 - 22	SCIP number	C0979fba-9907-458f-a94a-db781440f273
Contact type	Turned silver plated	Approvals / Standards	
Further technical details		Certifications	CSA, EAC
Weight	1,60 g	UL	ECBT2
Operating temperature range (min, max)	-40°C ... +125°C	General ordering information	
Conductors stripping length	7,5 mm	EAN13 code	8015747170970
		eCl@ss 8.1	27440204
		ETIM 7.0	EC000796
Packaging Information			
Packaging length	112,00 mm	Packaging length	112,00 mm
Packaging height	95,00 mm	Packaging height	95,00 mm
Packaging width	117,00 mm	Packaging width	117,00 mm
Packaging weight	1,48 kg	Packaging weight	1,48 kg
Packaging volume	1,24 dm ³	Packaging volume	1,24 dm ³
Packaging description	Carton box	Packaging description	Carton box
Packaging quantity	800 Pcs	Packaging quantity	800 Pcs
Packaging EAN code	8015747171045	Packaging EAN code	8015747171045
Sub-packaging length	50,00 mm	Sub-packaging length	50,00 mm
Sub-packaging height	44,00 mm	Sub-packaging height	44,00 mm
Sub-packaging width	50,00 mm	Sub-packaging width	50,00 mm
Sub-packaging weight	0,19 kg	Sub-packaging weight	0,19 kg
Sub-packaging volume	0,11 dm ³	Sub-packaging volume	0,11 dm ³
Sub-packaging description	Plastic box	Sub-packaging description	Plastic box
Sub-packaging quantity	100 Pcs	Sub-packaging quantity	100 Pcs
Sub-packaging EAN barcode	8015747171052	Sub-packaging EAN barcode	8015747171052

Part number

CCFA 0.3



Catalogue drawings

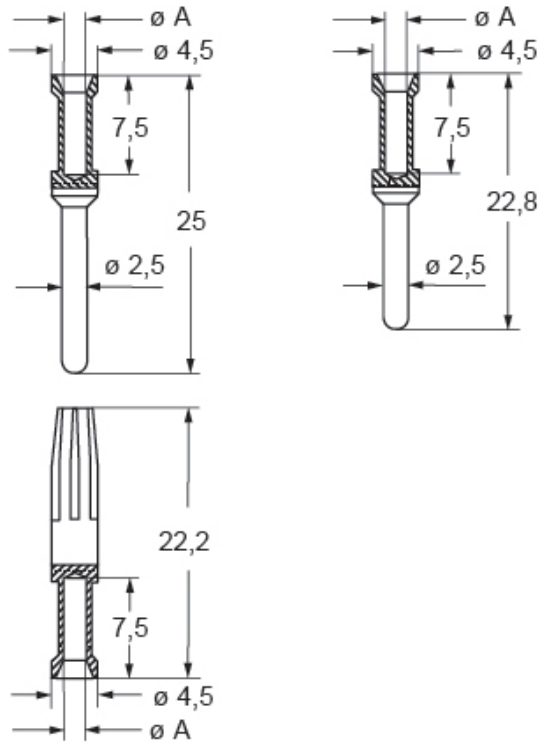

CCF, CCM and CC..AN contacts

conductor section mm ²	conductor slot ø A (mm)	conductors stripping length (mm)
0,14-0,37	0,9	7,5
0,5	1,1	7,5
0,75	1,3	7,5
1,0	1,45	7,5
1,5	1,8	7,5
2,5	2,2	7,5
3	2,55	7,5
4	2,85	7,5