

Part number

CX 3/4 XDF



Female modular insert, Mixo series, crimp connection, 3 + 4 poles, 1 module, 40 A 830 V 8 kV 3 / 10 A 830 V 8 kV 3


Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate
Series	Mixo	Colour	RAL 7032 grey
Connection type	Crimp connection	RoHs conformity	Compliant
Gender	Female	China RoHs - EFUP	E
N. of poles	3 poles	REACH SVHC substances	No
Auxiliary poles	4D	Approvals / Standards	
Size	1 module	Reference standard	EN 61984:2009-06
Specification	Standard & HNM (High Number of Matings)	Certifications	CSA, CQC, DNV, BV, EAC
Technical data		UL	ECBT2
Current	40 A	cUL	ECBT8
Voltage	830 V	General ordering information	
Rated impulse withstand voltage	8 kV	EAN13 code	8015747176774
Pollution degree	3	eCl@ss 8.1	27440205
Rated voltage according to UL/CSA	600 V	ETIM 7.0	EC000438
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Packaging Information	
Further technical details		Packaging length	180,00 mm
Characteristics according to EN 61984	40A 830V 8kV 3 (aux:10A 830V 8kV 3)	Packaging height	120,00 mm
Insulation resistance	≥ 10 GΩ	Packaging width	155,00 mm
Contact resistance	≤ 0,3 mΩ (3 poles), ≤ 3 mΩ (4 poles)	Packaging weight	0,72 kg
Weight	9,00 g	Packaging volume	3,35 dm ³
Operating temperature range (min, max)	-40 °C ... +125 °C	Packaging description	Carton box
UL 94 flammability rating	V-0	Packaging quantity	60 Pcs
		Packaging EAN code	8015747221375
		Sub-packaging length	35,00 mm
		Sub-packaging height	40,00 mm
		Sub-packaging width	155,00 mm
		Sub-packaging weight	0,12 kg
		Sub-packaging volume	0,22 dm ³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	10 Pcs
		Sub-packaging EAN barcode	8015747176781

Part number

CX 3/4 XDF



Catalogue drawings

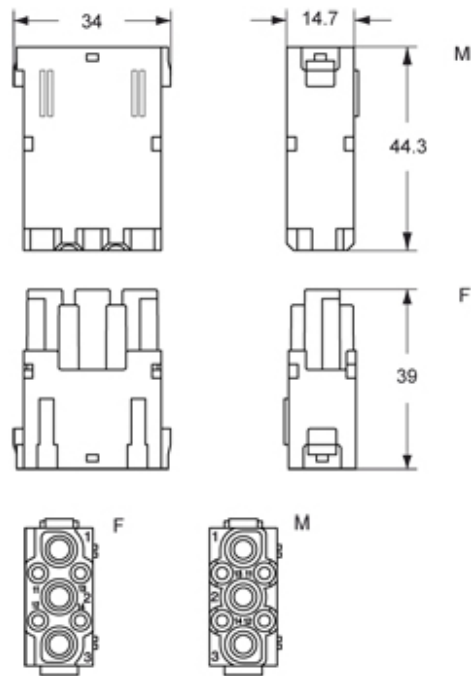

Catalogue drawings

load curves - MIXO series (CX 3/4 XD)

