




E-Xtreme[®]



Titanium
plasma protected

3.000 hours in salt spray tests





E-Xtreme® series

CORROSION-PROOF METAL ENCLOSURES
3.000 HOURS IN SALT SPRAY TESTS




salt mist



frequent matings

V-TYPE lever version

For extreme environments as: **icing, very low temperatures, impact resistant, salt mist and chemical resistant.** The lever handle is in **stainless steel** and the locking device guarantees an **IP66/IP67 protection degree.**

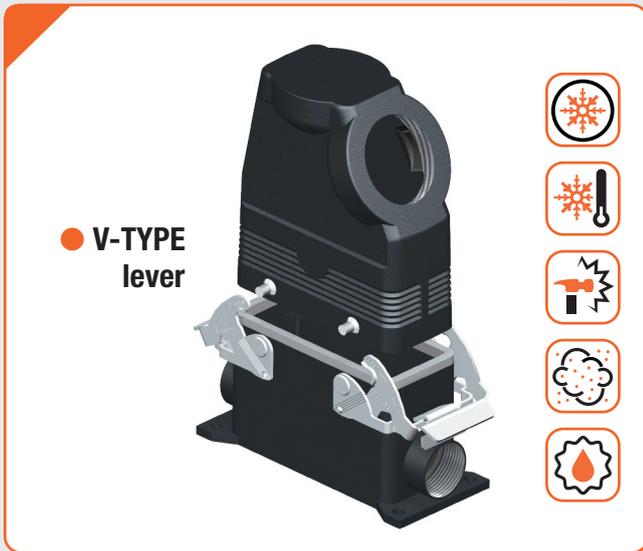



icing



impact resistant



very low temperatures



UV radiations



chemical resistant

Advantages

Metal hoods and housings intended for **extremely demanding environments**, with special protective treatment under painting. Their **special patented protective coating** assures a high level of protection against the corrosion even in case of long term exposure to salt mist.

- 3.000 hours in salt spray tests




- IP66, IP67, IP69 protection degree (EN 60529)

- Corrosion-proof aluminium with a special coating under the powder painting colour RAL 7016 dark grey

- FKM gasket (-40 °C...+180 °C) or silicone gasket (-60 °C...+180 °C)

- V-TYPE lever or C-TYPE lever, hoods with moulded pegs or riveted stainless steel bolts

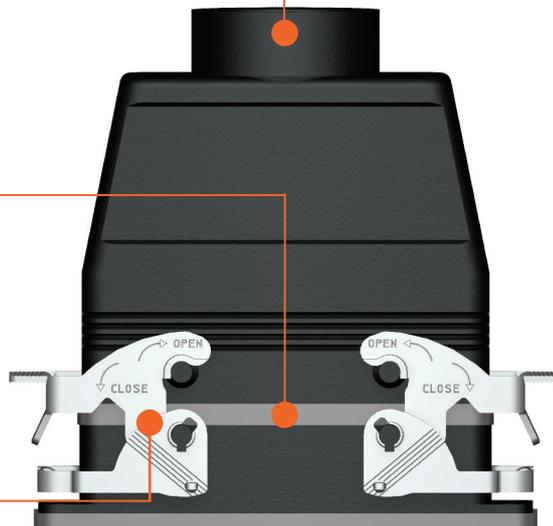

- Durable protection against damage caused by stone-chip, icing, salt mist, UV radiations and harsh gases

icing



very low temperatures



salt mist



impact resistant



UV radiations



chemical resistant





Titanium plasma protected

3.000 hours in salt spray tests



Technical details

The protection is granted also in case of impact with stones and sand. The materials are able to withstand UV radiations, a wide temperature range and harsh chemicals. The E-Xtreme® series is available in the **full range** of ILME aluminum hoods and housings versions.

Applicable test standards

EN 61984:2009-06	Connectors - Safety requirements and tests
EN 60529: 1991 + A1: 2000 + A2: 2013	Degrees of protection provided by enclosures (IP code)
EN ISO 9227: 2012	Corrosion tests in artificial atmospheres - Salt spray tests
ASTM B117-16	Standard practice for operating salt spray (fog) apparatus
EN 60512 (series)	Connectors for electronic equipment - Tests and measurement
EN 60068-2-68: 1996	Environmental testing - Part 2-68: Tests - Test L: Dust and sand
EN ISO 20567-1: 2005	Paints and varnishes -- Determination of stone-chip resistance of coatings -- Part 1: Multi-impact testing

General specifications

Material	Aluminum die-cast
Painting	Epoxy powder coating
Colour	RAL 7016 (dark grey)
Locking lever, springs and pegs	Stainless steel
Lever handle	C-TYPE lever: Polyamide V-TYPE lever: Stainless steel
Gasket	FKM
Silicone-based compounds	Free (except version for -60 °C... +180 °C)
EN ISO 9227: 2012	3.000 hours (V-TYPE lever and hood with moulded pegs) 2.000 hours (C-TYPE lever and hood with riveted stainless steel bolts)
Temperature limits	-40 °C... +180 °C (-60 °C... +180 °C with silicone gasket) (V-TYPE lever and IP68) -40 °C... +125 °C (C-TYPE lever and sizes "21.21", "49.16" and "66.16")
Degree of protection according to IEC/EN 60529 (in mated and locked condition)	IP44, IP65 /IP69, IP66 /IP69, IP66/ IP67 /IP69, IP66/ IP68 /IP69
Stone chipping test	ISO 20567-1
Dust and sand blasting test	EN 60068-2-68
Vibration test	EN 61373 cat. 1B, 3 axis EN 60068-2-6 10 ÷ 500 Hz 0,35 mm / 5 g break point 60, 1 Hz 3 axis
Shock test	EN 61373 cat. 1B, 3 axis
UV resistance	EN ISO 4892-2, EN 50467 on locked housings
Ozone resistance	EN 50467 on locked housings
Chemical resistance	Cleaning fluids, anti-freezing fluids, mineral and synthetic oils, cooling fluids, diesel fuel



icing



impact
resistant



very low
temperatures



UV radiations



chemical
resistant

C-TYPE lever version

For extreme environments as: **salt mist, UV radiations, chemical resistant and frequent matings.**
The lever handle is in **polyamide and stainless steel** and the locking device guarantees an **IP65/IP66 protection degree.**





ILME S.p.A.
Via Marco Antonio Colonna, 9
20149 Milano - Italy
www.ilme.com

CATALOGUES



XDG XTR 720



8 015747 279222