

Part number

CIF2D 0.2



Female crimp contact, CI series, 5 A, turned gold plated, wire cross section 0,08 - 0,21 mm², AWG 28 - 24, high thickness gold plating


Product description		Material properties	
Product type	Crimp contact	Main material	Copper alloy
Series	CI		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Gender	Female	RoHs conformity	
Specification	High thickness gold plating	China RoHs - EFUP	50
Technical data		REACH SVHC substances	Yes
Current	5 A	Lead	
Wire cross-section	0,08 mm ² - 0,21 mm ²	SCIP number	C0979fba-9907-458f-a94a-db781440f273
AWG size	28 - 24	Approvals / Standards	
Contact type	Turned gold plated	Certifications	CSA, EAC
Further technical details		UL	ECBT2
Mating cycles	≥ 500	General ordering information	
Contact resistance	≤ 4 mΩ	EAN13 code	8015747276818
Weight	0,01 g	eCl@ss 8.1	27440204
Conductors stripping length	4 mm	ETIM 7.0	EC000796
Packaging Information			
Packaging description	Carton box		
Packaging quantity	1000 Pcs		
Packaging EAN code	8015747283649		
Sub-packaging length	75,00 mm		
Sub-packaging height	89,00 mm		
Sub-packaging width	110,00 mm		
Sub-packaging volume	0,73 dm ³		
Sub-packaging description	Plastic bag		
Sub-packaging quantity	25 Pcs		
Sub-packaging EAN barcode	8015747283656		

Part number

CIF2D 0.2



Catalogue drawings

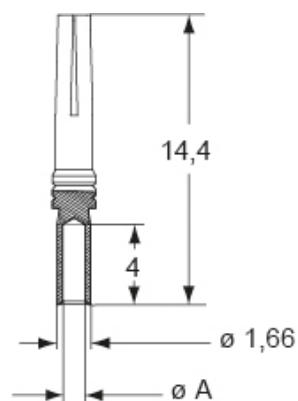

CIF2D and CIM2D contacts

conductor section (mm ²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,08-0,21	0,64	4
0,13-0,33	0,90	4
0,33-0,52	1,12	4
0,52-0,75	1,12	4