

Part number

CKM 04 N



Male insert, CK series, screw terminal connection, 4 poles + PE, 10 A 230/400 V 4 kV 3, size "21.21", black colour


Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CK	Other materials	Contacts: copper alloy Gasket: NBR
Connection type	Screw terminal connection	Colour	RAL 9005 black
Gender	Male	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	4 poles + 	China RoHs - EFUP	50
Size	Size "21.21"	REACH SVHC substances	Yes Lead
Specification	Black colour Black colour	SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Technical data		Approvals / Standards	
Current	10 A	Reference standard	EN 61984:2009-06
Voltage	230 - 400 V	Certifications	CSA, CQC, DNV, BV, EAC
Rated impulse withstand voltage	4 kV	UL	ECBT2
Pollution degree	3	General ordering information	
Rated voltage according to UL/CSA	600 V	EAN13 code	8015747028325
Wire cross-section	0,75 mm ² - 2,50 mm ²	eCl@ss 8.1	27440205
AWG size	18 - 14	ETIM 7.0	EC000438
Contact type	Turned silver plated	Packaging Information	
IP degree of protection	IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure	Packaging length	210,00 mm
Further technical details		Packaging height	200,00 mm
Characteristics according to EN 61984	10A 230/400V 4kV 3; 10A 400/690V 4kV 2	Packaging width	130,00 mm
Mating cycles	≥ 500	Packaging weight	3,28 kg
Insulation resistance	≥ 10 GΩ	Packaging volume	5,46 dm ³
Contact resistance	≤ 2 mΩ	Packaging description	Carton box
Weight	15,00 g	Packaging quantity	200 Pcs
Operating temperature range (min, max)	-40°C ... +100°C	Packaging EAN code	8015747028332
Conductors stripping length	6 mm	Sub-packaging length	197,00 mm
UL 94 flammability rating	V-1	Sub-packaging height	35,00 mm
Torque for main contact	M3: 0,5 Nm; 4,4 lb.in (0,5 x 3 mm)	Sub-packaging width	113,00 mm
Tightening torque for PE connection	M3: 0,5 Nm; 4,4 lb.in (0,5 x 3 mm)	Sub-packaging weight	0,66 kg
Tightening torque for fixing screws	M3: 0,5 Nm; 4,4 lb.in (Ph1 or 0,8 x 5,5 mm)	Sub-packaging volume	0,78 dm ³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	40 Pcs
		Sub-packaging EAN barcode	8015747028349

Part number

CKM 04 N



Catalogue drawings

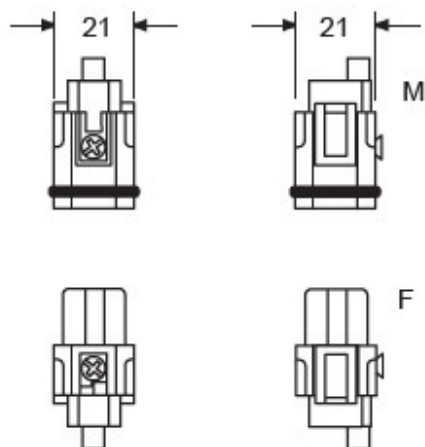

contacts side (front view)



Derating curves

