


Part number

# CNEF 16 T

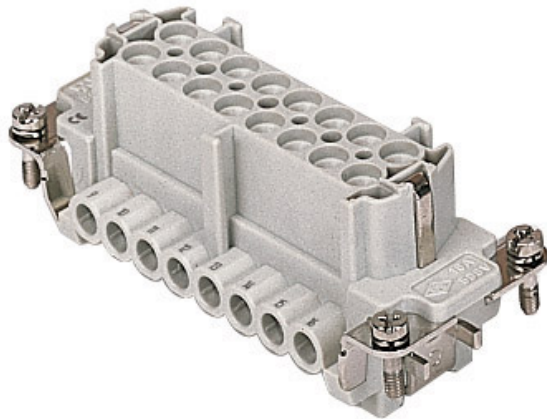

Female insert, CNE series, screw terminal connection, 16 poles + PE, 16 A 500 V 6 kV 3, size "77.27", with plate



| Product description                    |                                                                                              | Material properties          |                                                                                |
|----------------------------------------|----------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                           | Insert                                                                                       | Main material                | Polycarbonate (PC)                                                             |
| Series                                 | CNE                                                                                          | Other materials              | Contacts: copper alloy                                                         |
| Connection type                        | Screw terminal connection                                                                    | Colour                       | RAL 7032 grey                                                                  |
| Gender                                 | Female                                                                                       | RoHs conformity              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles                            | 16 poles +  | China RoHs - EFUP            | 50                                                                             |
| Size                                   | Size 77.27                                                                                   | REACH SVHC substances        | Yes                                                                            |
| Specification                          | With plate, also for non-prepared conductors                                                 | Lead                         |                                                                                |
| Technical data                         |                                                                                              | SCIP number                  | 1a9c93ff-0445-4a16-81e3-1609ac5274d6                                           |
| Current                                | 16 A                                                                                         | Approvals / Standards        |                                                                                |
| Voltage                                | 500 V                                                                                        | Reference standard           | EN 61984:2009-06                                                               |
| Rated impulse withstand voltage        | 6 kV                                                                                         | Certifications               | CSA, CQC, DNV, BV, EAC                                                         |
| Pollution degree                       | 3                                                                                            | UL                           | ECBT2, PVVA2                                                                   |
| Rated voltage according to UL/CSA      | 600 V                                                                                        | cUL                          | ECBT8, PVVA8                                                                   |
| Wire cross-section                     | 0,50 mm <sup>2</sup> - 4,00 mm <sup>2</sup>                                                  | General ordering information |                                                                                |
| AWG size                               | 20 - 12                                                                                      | EAN13 code                   | 8015747032346                                                                  |
| Contact type                           | Turned silver plated                                                                         | eCl@ss 8.1                   | 27440205                                                                       |
| IP degree of protection                | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure                                   | ETIM 7.0                     | EC000438                                                                       |
| Further technical details              |                                                                                              | Packaging Information        |                                                                                |
| Characteristics according to EN 61984  | 16A 500V 6kV 3; 16A 400/690V 6kV 2                                                           | Packaging length             | 230,00 mm                                                                      |
| Mating cycles                          | ≥ 500                                                                                        | Packaging height             | 110,00 mm                                                                      |
| Insulation resistance                  | ≥ 10 GΩ                                                                                      | Packaging width              | 180,00 mm                                                                      |
| Contact resistance                     | ≤ 1 mΩ                                                                                       | Packaging weight             | 2,85 kg                                                                        |
| Weight                                 | 84,50 g                                                                                      | Packaging volume             | 4,55 dm <sup>3</sup>                                                           |
| Operating temperature range (min, max) | -40 °C ... +125 °C                                                                           | Packaging description        | Carton box                                                                     |
| Conductors stripping length            | 7 mm                                                                                         | Packaging quantity           | 30 Pcs                                                                         |
| UL 94 flammability rating              | V-0                                                                                          | Packaging EAN code           | 8015747032353                                                                  |
| Torque for main contact                | M3: 0,5 Nm; 4,4 lb.in (Ph0 or 0,8 x 4 mm)                                                    | Sub-packaging length         | 87,00 mm                                                                       |
|                                        |                                                                                              | Sub-packaging height         | 36,00 mm                                                                       |
|                                        |                                                                                              | Sub-packaging width          | 180,00 mm                                                                      |
|                                        |                                                                                              | Sub-packaging weight         | 0,48 kg                                                                        |
|                                        |                                                                                              | Sub-packaging volume         | 0,56 dm <sup>3</sup>                                                           |
|                                        |                                                                                              | Sub-packaging description    | Carton tray                                                                    |
|                                        |                                                                                              | Sub-packaging quantity       | 5 Pcs                                                                          |
|                                        |                                                                                              | Sub-packaging EAN barcode    | 8015747032360                                                                  |

Part number

# CNEF 16 T



Catalogue drawings

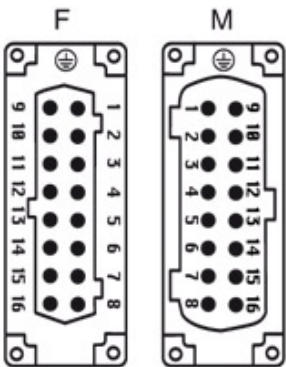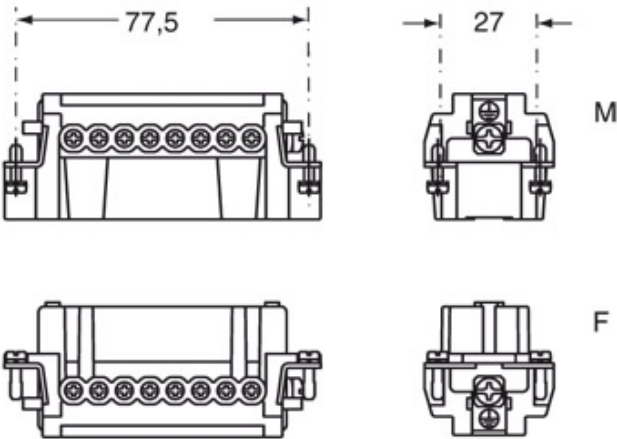

Catalogue drawings

