


Part number


CXL 2/4 SF



Brief description:

female insert , 2 pole fibre optics + 4 poles + PE optional, crimp connections, 10A 25V, 0,8kV, 3, size "21.21", CLASS insert series

Product description	
Model	female insert
Version	crimp connections
Series	DESINA
Product type	for female contacts 10A
Style	inserts for fixed enclosures, complete with electro-optical interface
Family	CLASS inserts
Size	size "21.21"
N. of poles	2 pole fibre optics + 4 poles +  optional
Technical data	
Current	10 A
Voltage	25 V
Rated impulse withstand voltage	0,8 kV
Pollution degree	3
Operating temperature range (min, max)	-40°C...+70°C
Mating cycles	≥ 500
IP degree of protection	IP20 without enclosure, IP65/IP67 with enclosure
Further technical details	
Characteristics according to EN 61984	10A 250V 4kV 3; 10A 230/400V 4kV 2
Insulation resistance	≥ 10 GΩ
Contact resistance	≤ 3 mΩ
Rated voltage according to UL/CSA	600 V
UL 94 flammability rating	V-0
Weight	20,00 g

Approvals / Standards	
Reference standard	EN 61984:2009-06
Quality mark	 , DNV GL, BV
Conformity	Not applicable
General ordering information	
EAN13 code	8015747098526
Tariff number	
Country of origin	
ETIM classification	EC000438
Packaging Information	
Sub-packaging weight	0,02 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747105712


Part number

CXL 2/4 SF



Catalogue drawings

CXL 2/4 SM

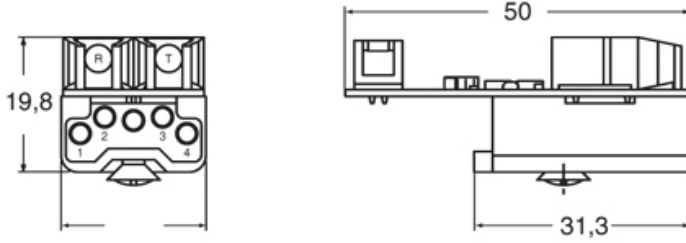

CXL 2/4 SF

