Part number C30MA 50 P






Male crimp contact, C30 series, 300 A, turned silver plated, wire cross section 50 mm², AWG 1, finger-proof version


Product description			
Product type	Crimp contact		
Series	C30		
Gender	Male		
Specification	Finger-proof version		
Technical data			
Current	300 A		
Wire cross-section	50,00 mm²		
AWG size	1		
Contact type	Turned silver plated		
Further technical details			
Contact resistance	≤ 0,2 mΩ		
Weight	37,10 g		
Conductors stripping length	22,5 mm		

Material properties			
Main material	Copper alloy		
Other materials	Cap: polycarbonate (PC)		
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight		
China RoHs - EFUP	50		
REACH SVHC substances	Yes Lead		
General ordering information			
EAN13 code	8015747290807		
Packaging Information			
Packaging length	112,00 mm		
Packaging height	95,00 mm		
Packaging width	117,00 mm		
Packaging volume	1,24 dm³		
Packaging description	Carton box		
Packaging quantity	40 Pcs		
Packaging EAN code	8015747290821		
Sub-packaging description	Plastic box		
Sub-packaging quantity	5 Pcs		
Sub-packaging EAN barcode	8015747290814		






Catalogue drawings



C30MA..P contacts

conductor section (mm ²)	conductor slot ø A (mm)	ø B (mm)	C (mm)	conductor stripping length (mm)
16	5,5	18	42,7	19
25	7	18	42,7	19
35	8,2	18	43,7	20
50	10	18	49,2	22,5
70	11,5	18	49,2	22,5
95	13,5	21	49,2	22,5
120	15,5	21	49,2	22,5

Notes

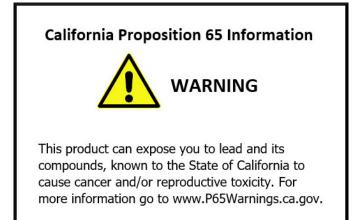

Dimensions shown in mm are not binding and may be changed without notice.