



Part number

CTM 64 L

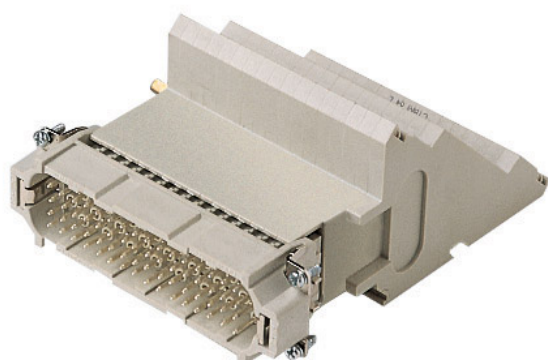

Female insert, CT series, screw terminal connection, 64 poles + PE, 10 A 250 V 4 kV 3, size "104.27", with incorporated terminal block, left side mounting


Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CT	Other materials	Contacts: copper alloy
Connection type	Screw terminal connection	Colour	RAL 7032 grey
Gender	Male	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	64 poles + 	China RoHs - EFUP	50
Size	Size "104.27"	REACH SVHC substances	Yes
Specification	Left side mounting With incorporated terminal block	Lead	Lead
Technical data		SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Current	10 A	Approvals / Standards	
Voltage	250 V	Reference standard	EN 61984:2009-06
Rated impulse withstand voltage	4 kV	Certifications	CSA, CQC, DNV, BV, EAC
Pollution degree	3	UL	ECBT2
Rated voltage according to UL/CSA	600 V	General ordering information	
Wire cross-section	0,75 mm ² - 2,50 mm ²	EAN13 code	8015747041447
AWG size	18 - 14	eCl@ss 8.1	27440205
Contact type	Turned silver plated	ETIM 7.0	EC000438
IP degree of protection	IP20 without enclosure, IP66/IP69 with enclosure	Packaging Information	
Further technical details		Sub-packaging length	145,00 mm
Characteristics according to EN 61984	10A 250V 4kV 3; 10A 230/400V 4kV 2	Sub-packaging height	89,00 mm
Mating cycles	≥ 500	Sub-packaging width	120,00 mm
Insulation resistance	≥ 10 GΩ	Sub-packaging weight	0,55 kg
Contact resistance	≤ 4 mΩ	Sub-packaging volume	1,55 dm ³
Weight	554,00 g	Sub-packaging description	Carton box
Operating temperature range (min, max)	-40 °C ... +125 °C	Sub-packaging quantity	1 Pcs
Conductors stripping length	12 mm	Sub-packaging EAN barcode	8015747041454
UL 94 flammability rating	V-0		
Torque for main contact	M2,6: 0,4 Nm; 3,5 lb.in (0,5 x 3 mm)		
Tightening torque for PE connection	M4: 1,2 Nm, 10,6 lb.in (Ph2 or 1,0x5,5mm)		
Tightening torque for fixing screws	M3: 0.5 Nm; 4.4 lb.in (Ph1 or 0.8x4 mm)		

Part number



CTM 64 L



Catalogue drawings

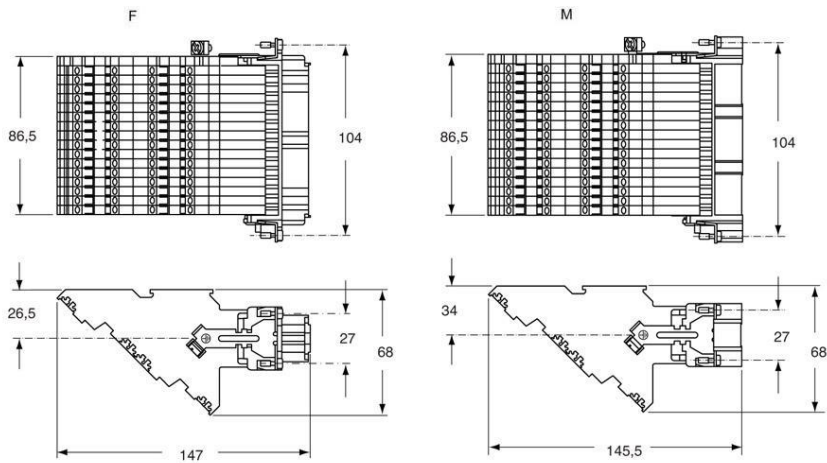


Catalogue drawings

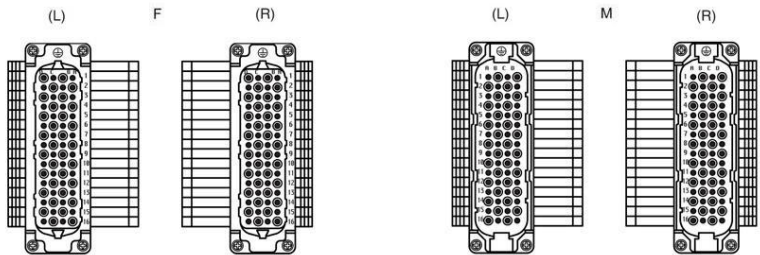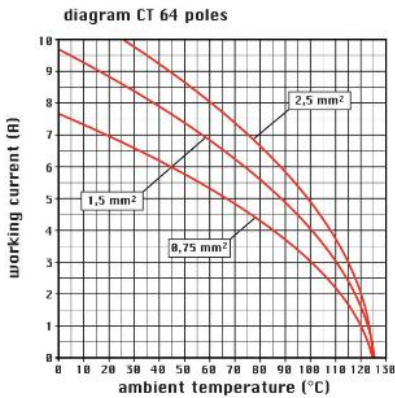

Notes

Dimensions shown in mm are not binding and may be changed without notice.

CT ... : for non-prepared conductors

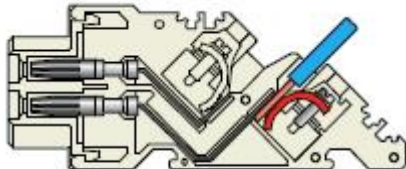

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
