

Part number

CX 01 J8AIF



Female modular insert, Mixo Data series, RJ45, 1 A 50 V 0,8 kV 3, 1 module, IDC, contact coding according to T568A

Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate (PC)
Series	Mixo Data	Colour	RAL 7032 grey
Connection type	RJ45	RoHs conformity	Compliant
Gender	Female	China RoHs - EFUP	E
N. of poles	1 seat for RJ45 connector	REACH SVHC substances	No
Size	1 module	Approvals / Standards	
Specification	IDC RJ45, Cat. 6A, female IDC insert according to T568A	Certifications	DNV
Technical data		UL	ECBT2
Current	1 A	cUL	ECBT8
Voltage	50 V	General ordering information	
Rated impulse withstand voltage	0,8 kV	EAN13 code	8015747264853
Pollution degree	3	eCl@ss 8.1	27440205
Rated voltage according to UL/CSA	50 V	ETIM 7.0	EC000438
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Packaging Information	
Further technical details		Sub-packaging description	Plastic bag
Characteristics according to EN 61984	1 A 50 V 0,8 kV 3	Sub-packaging quantity	1 Pcs
Weight	5,00 g	Sub-packaging EAN barcode	8015747264860
Operating temperature range (min, max)	-40°C...+70°C		
UL 94 flammability rating	V-0		


Part number

CX 01 J8AIF







Catalogue drawings

Catalogue drawings



PIN assignment T568A
according to TIA/EIA 568-C.2

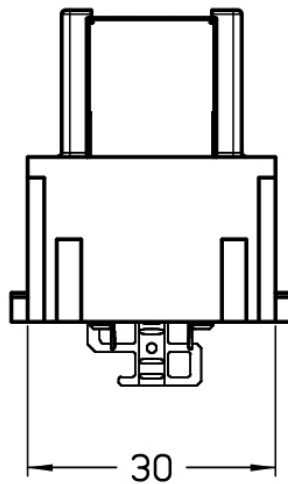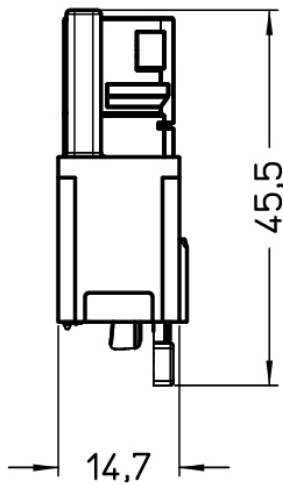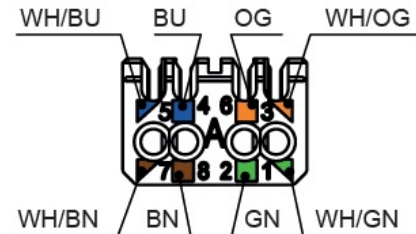

Notes

Standard modular inserts:
-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.