

Part number

# CX 02 BM



Male modular insert, Mixo Bus series, coaxial, 2 modules, 50 V 0,8 kV 3, seat for 2 shielded connectors

Product description		Material properties	
<b>Product type</b>	Modular insert	<b>Main material</b>	Polycarbonate
<b>Series</b>	06ABS	<b>Colour</b>	RAL 7032 grey
<b>Connection type</b>	Coaxial	<b>RoHs conformity</b>	Compliant
<b>Gender</b>	Male	<b>China RoHs - EFUP</b>	E
<b>Size</b>	2 modules	<b>REACH SVHC substances</b>	No
<b>Specification</b>	Seat for 2 shielded connectors	<b>Approvals / Standards</b>	
<b>Technical data</b>		<b>Reference standard</b>	EN 61984:2009-06
<b>Voltage</b>	50 V	<b>Certifications</b>	CSA, CQC, DNV, EAC
<b>Rated impulse withstand voltage</b>	0,8 kV	<b>UL</b>	ECBT2
<b>Pollution degree</b>	3	<b>cUL</b>	ECBT8
<b>Rated voltage according to UL/CSA</b>	50 V	<b>General ordering information</b>	
<b>IP degree of protection</b>	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	<b>EAN13 code</b>	8015747095938
<b>Further technical details</b>		<b>eCl@ss 8.1</b>	27440205
<b>Characteristics according to EN 61984</b>	50V 0.8kV 3	<b>ETIM 7.0</b>	EC000438
<b>Insulation resistance</b>	≥ 10 GΩ	<b>Packaging Information</b>	
<b>Weight</b>	12,60 g	<b>Packaging length</b>	350,00 mm
<b>Operating temperature range (min, max)</b>	-40 °C ... +125 °C	<b>Packaging height</b>	105,00 mm
<b>UL 94 flammability rating</b>	V-0	<b>Packaging width</b>	145,00 mm
		<b>Packaging weight</b>	1,06 kg
		<b>Packaging volume</b>	5,33 dm <sup>3</sup>
		<b>Packaging description</b>	Carton box
		<b>Packaging quantity</b>	60 Pcs
		<b>Packaging EAN code</b>	8015747221054
		<b>Sub-packaging length</b>	35,00 mm
		<b>Sub-packaging height</b>	40,00 mm
		<b>Sub-packaging width</b>	155,00 mm
		<b>Sub-packaging weight</b>	0,09 kg
		<b>Sub-packaging volume</b>	0,22 dm <sup>3</sup>
		<b>Sub-packaging description</b>	Carton tray
		<b>Sub-packaging quantity</b>	5 Pcs
		<b>Sub-packaging EAN barcode</b>	8015747095945


Part number

# CX 02 BM




## Catalogue drawings

### CX 02 BM

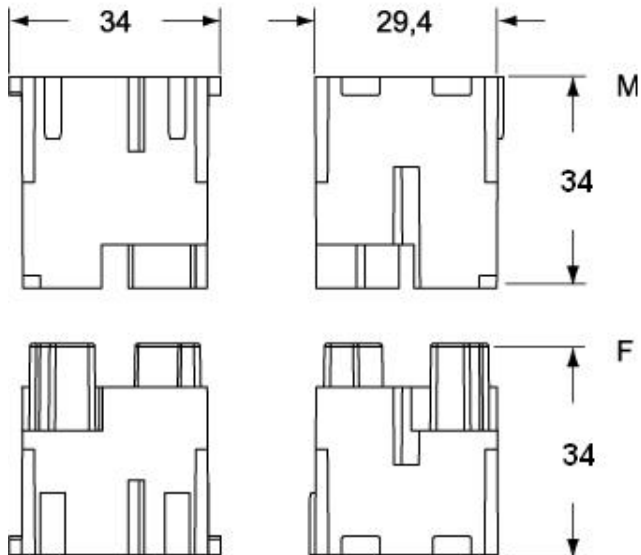

### CX 02 BF

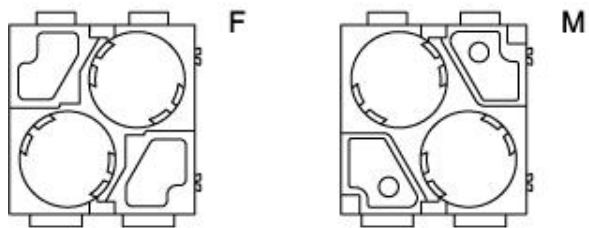

## Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.