

Part number

CX 02 P



Modular insert, Mixo series, for pneumatic contacts, 1 module, with 2 seats for tube diameter 6,0 mm

| Product description | |
|--|---------------------------------------|
| Product type | Modular insert |
| Series | Mixo |
| Connection type | Pneumatic |
| N. of poles | 2 poles |
| Size | 1 module |
| Specification | With 2 seats for tube diameter 6,0 mm |
| Further technical details | |
| Mating cycles | ≥ 500 |
| Insulation resistance | ≥ 10 GΩ |
| Weight | 5,60 g |
| Operating temperature range (min, max) | -40°C ... +80°C |
| UL 94 flammability rating | V-0 |


| Material properties | |
|------------------------------|--------------------|
| Main material | Polycarbonate (PC) |
| Colour | RAL 5015 blue |
| RoHs conformity | Compliant |
| China RoHs - EFUP | E |
| REACH SVHC substances | No |
| Approvals / Standards | |
| Certifications | CSA, DNV, BV |
| UL | ECBT2 |
| cUL | ECBT8 |
| General ordering information | |
| EAN13 code | 8015747095952 |
| eCl@ss 8.1 | 27440205 |
| ETIM 7.0 | EC000438 |
| Packaging Information | |
| Packaging length | 180,00 mm |
| Packaging height | 120,00 mm |
| Packaging width | 155,00 mm |
| Packaging weight | 0,83 kg |
| Packaging volume | 3,35 dm³ |
| Packaging description | Carton box |
| Packaging quantity | 60 Pcs |
| Packaging EAN code | 8015747221160 |
| Sub-packaging length | 35,00 mm |
| Sub-packaging height | 40,00 mm |
| Sub-packaging width | 155,00 mm |
| Sub-packaging weight | 0,14 kg |
| Sub-packaging volume | 0,22 dm³ |
| Sub-packaging description | Carton tray |
| Sub-packaging quantity | 10 Pcs |
| Sub-packaging EAN barcode | 8015747102339 |

Part number


CX 02 P



Catalogue drawings

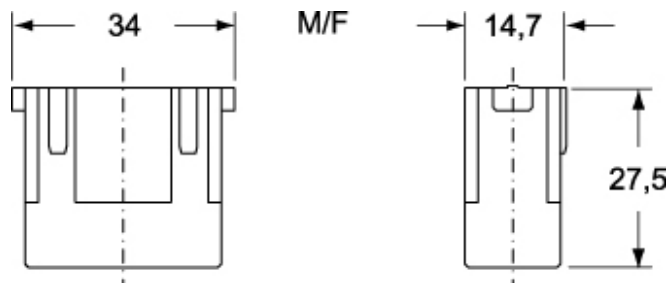


CX 03 P



M/F

CX 02 P



M/F

Notes

Warnings:

- 1) Please note that the VDE-Directives do not allow the combination of electrical and liquid connections within the same connector for clear safety reasons.
- 2) CRM/F CX code pins and guides must be used for pneumatic contacts modules. These pins also provide coding if pneumatic contacts modules are used exclusively.

Use of units for pneumatic contacts

- identical male and female modular units
- pneumatic contacts for pressure values up to 8 bar, for use with clean and dry compressed air
- contacts for gas and liquids on request (see warning)
- possibility of using tubes with different diameters in the same modular unit
- female contacts with or without closing valve
- working temperature range - 40 °C ÷ + 80 °C
- use of tubes with Ø 6 mm, and possible replacement of tubes with assembled units.

Dimensions shown in mm are not binding and may be changed without notice.