

Part number

CX 03 MP



Modular insert, Mixo series, for pneumatic contacts, 1 module, with 3 seats for tube diameter 3 - 4 - 6 mm


Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate (PC)
Series	Mixo	Colour	RAL 5015 blue
Connection type	Pneumatic	RoHs conformity	Compliant
N. of poles	3 poles	China RoHs - EFUP	E
Size	1 module	REACH SVHC substances	No
Specification	With 3 seats for tube diameter 3 - 4 - 6 mm	General ordering information	
Further technical details		EAN13 code	8015747182140
Mating cycles	≥ 500 / ≥ 10.000 with HNM frames and enclosures	eCl@ss 8.1	27440205
Insulation resistance	≥ 10 GΩ	ETIM 7.0	EC000438
Weight	6,50 g	Packaging Information	
Operating temperature range (min, max)	-40°C...+80°C	Packaging length	180,00 mm
UL 94 flammability rating	V-0	Packaging height	120,00 mm
		Packaging width	155,00 mm
		Packaging weight	0,58 kg
		Packaging volume	3,35 dm³
		Packaging description	Carton box
		Packaging quantity	60 Pcs
		Packaging EAN code	8015747182157
		Sub-packaging length	35,00 mm
		Sub-packaging height	40,00 mm
		Sub-packaging width	155,00 mm
		Sub-packaging weight	0,10 kg
		Sub-packaging volume	0,22 dm³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	10 Pcs
		Sub-packaging EAN barcode	8015747182164

Part number

CX 03 MP



Catalogue drawings

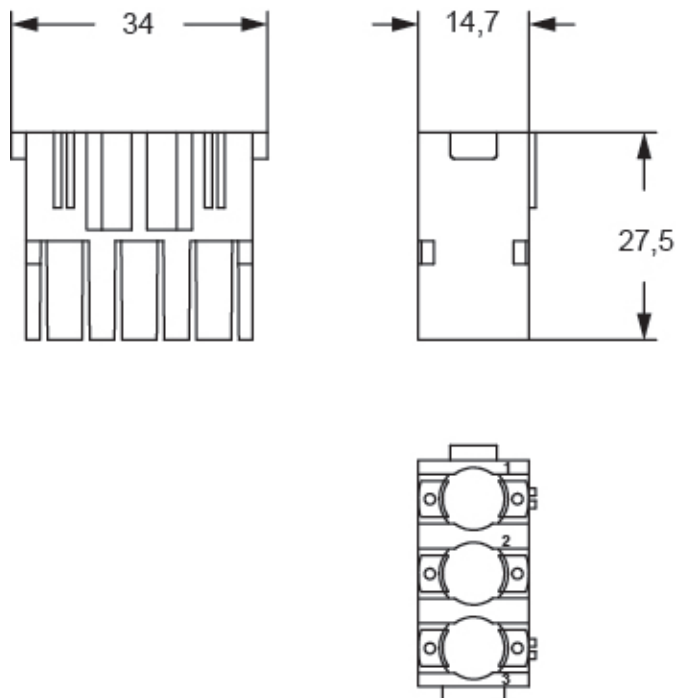

Notes

Warnings:

1) CRM/F CX code pins and guides must be used for pneumatic contacts modules. These pins also provide coding if pneumatic contacts modules are used exclusively.

without notice.

Use of units for pneumatic contacts

- pneumatic contacts for pressure values up to 10 bar, for use with clean and dry compressed air
- possibility of using tubes with different diameters in the same modular unit
- female contacts with or without closing valve
- working temperature range - 40 °C ÷ + 80 °C
- use of tubes with Ø 3 - 4 and 6 mm, and possible replacement of tubes with assembled units. Tube with

- ID inner Ø (push-over attachment of tubes over barbed straight contacts):

CX xx MPF/M, CX xx MPV

- OD outer Ø (push-in attachment of tubes to the quick-fitting contacts):

CX xx MPQF/M, CX xx MPAV, CX xx MPAF/M, CX xx MPQV

Dimensions shown in mm are not binding and may be changed