

Part number

CX7MA 6.0 P



Male crimp contact, CX7 series, 70 A, silver plated, wire cross section 6 mm², AWG 10, finger-proof version


Product description		Material properties	
Product type	Crimp contact	Main material	Copper alloy
Series	CX7	Other materials	Cap: polycarbonate (PC)
Gender	Male		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Specification	Finger-proof version	RoHs conformity	
Technical data		China RoHs - EFUP	50
Current	70 A	REACH SVHC substances	Yes
Wire cross-section	6,00 mm ²		Lead
AWG size	10	SCIP number	C0979fba-9907-458f-a94a-db781440f273
Contact type	Turned silver plated	Approvals / Standards	
Further technical details		Certifications	EAC
Mating cycles	≥ 500	UL	ECBT2
Contact resistance	≤ 0,5 mΩ	cUL	ECBT8
Weight	9,00 g	General ordering information	
Operating temperature range (min, max)	-40°C ... +125°C	EAN13 code	8015747279130
Conductors stripping length	15 mm	eCl@ss 8.1	27440204
		ETIM 7.0	EC000796
Packaging Information			
Sub-packaging length			50,00 mm
Sub-packaging height			44,00 mm
Sub-packaging width			50,00 mm
Sub-packaging weight			0,14 kg
Sub-packaging volume			0,11 dm ³
Sub-packaging description			Plastic box
Sub-packaging quantity			16 Pcs
Sub-packaging EAN barcode			8015747279147

Part number

CX7MA 6.0 P



Catalogue drawings

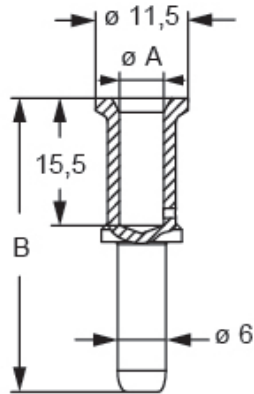

CX7MA .. P contacts

part No.	$\varnothing A$ (mm)	B (mm)	stripping length (mm)
CX7MA 6.0 P	3,5	36,6	15
CX7MA 10 P	4,3	35,8	15
CX7MA 16 P	5,5	35,8	15
CX7MA 25 P	7,0	35,8	15

Notes

Dimensions shown in mm are not binding and may be changed without notice.

With CXC inserts, nominal current is up to 80 A, according to the current derating diagram.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.