

Part number

CXMA 10



Male crimp contact, CX series, 40 A, turned silver plated, wire cross section 10 mm², AWG 8, cable diameter up to 7,5 mm

Product description

Product type	Crimp contact
Series	CX
Gender	Male

Technical data

Current	40 A
Wire cross-section	10,00 mm ²
AWG size	8
Contact type	Turned silver plated

Further technical details

Weight	3,10 g
Conductors stripping length	15 mm

Material properties

Main material	Copper alloy
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	C0979fba-9907-458f-a94a-db781440f273

Approvals / Standards

Certifications	CSA, EAC
UL	ECBT2
cUL	ECBT8

General ordering information

EAN13 code	8015747188098
eCl@ss 8.1	27440204
ETIM 7.0	EC000796

Packaging Information


Packaging length	112,00 mm
Packaging height	95,00 mm
Packaging width	117,00 mm
Packaging weight	1,36 kg
Packaging volume	1,24 dm ³
Packaging description	Carton box
Packaging quantity	400 Pcs
Packaging EAN code	8015747207089
Sub-packaging length	50,00 mm
Sub-packaging height	44,00 mm
Sub-packaging width	50,00 mm
Sub-packaging weight	0,17 kg
Sub-packaging volume	0,11 dm ³
Sub-packaging description	Plastic box
Sub-packaging quantity	50 Pcs
Sub-packaging EAN barcode	8015747188203

Part number

CXMA 10



Catalogue drawings

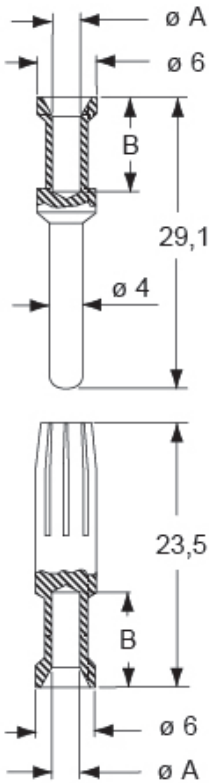

CXF and CXM contacts

conductor cross-sectional area (mm ²)	conductor slot $\varnothing A$ (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

Notes

CXFA/CXMA 10

cable diameter up to 7.5 mm, contact section up to 10 mm²

Dimensions shown in mm are not binding and may be changed without notice.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
