

Part number

MFVN 24.32



Hood, LS-TYPE series, with 4 pegs, M32 top cable entry without adapter, size "104.27", high construction


Product description		Material properties	
Product type	Hood	Colour	RAL 9005 black
Series	LS-TYPE	RoHs conformity	Compliant
Closing type	With 4 pegs	China RoHs - EFUP	E
Size	Size 104.27	REACH SVHC substances	No
Cable entry	Top cable entry M32	Approvals / Standards	
Specification	High construction	Certifications	DNV, BV
Technical data		UL	ECBT2
IP degree of protection	IP65	cUL	ECBT8
Further technical details		General ordering information	
Operating temperature range (min, max)	-40°C...+125°C	EAN13 code	8015747163606
		eCl@ss 8.1	27440202
		ETIM 7.0	EC000437
		Packaging Information	
		Sub-packaging description	Plastic packaging
		Sub-packaging quantity	5 Pcs
		Sub-packaging EAN barcode	8015747187824

Part number

MFVN 24.32



Catalogue drawings

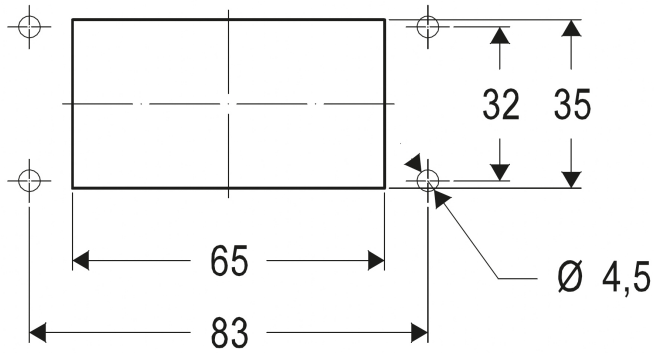

Catalogue drawings

CH.N - MA, MF.N enclosures size "104.27" **LS-TYPE version**

inserts:	page	housings with double lever	hoods with 4 pegs
CD	64 poles + @ 51-53 *		
CT, CTS (**)	64 poles + @ 57 *		
CDP	108 poles + @ 64-66 *		
COE	48 poles + @ 83-85 *		
CSH	24 poles + @ 91-93 *		
CCE	24 poles + @ 100-104 *		
CNE, CSE, JONE, JCSE	24 poles + @ 101 and 103 *		
CSS	24 poles + @ 122-153 *		
CTE, CTSE (**)	24 poles + @ 129 *		
CMSE	10+2 (aux) poles + @ 139 *		
CMCE	10+2 (aux) poles + @ 138 *		
CA	48 poles + @ 155 *		
MIKO	6 modules 160-165 *		

insert centre distance: 104 x 27 mm
* refer to catalogue page CN.12

description	part no.	entry	part no.	entry
bulkhead mounting housing, with 2 levers	CHIN 24	M		
surface mounting housing, high construction, with 2 levers	MAPN 24.32	32		
with pegs, side entry			MHON 24.32	32
with pegs, side entry, high construction			MFON 24.32	32
with pegs, side entry			MHVN 24.32	32
with pegs, side entry, high construction			MFVN 24.32	32

**** only in the CHIN 24 enclosure**

panel cut-out for bulkhead mounting housing in mm

- kiln powder coating with RAL 9005 black epoxy polyester powder
 - RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

IP65

dimensions shown are not binding and may be changed without notice

10

Notes

Dimensions shown in mm are not binding and may be changed without notice.