

Part number

# MHON 24.32



Hood, LS-TYPE series, with 4 pegs, M32 side cable entry, size "104.27"

#### Product description

<b>Product type</b>	Hood
<b>Series</b>	LS-TYPE
<b>Closing type</b>	With 4 pegs
<b>Size</b>	Size 104.27
<b>Cable entry</b>	Side cable entry M32

#### Technical data

<b>IP degree of protection</b>	IP65
--------------------------------	------

#### Further technical details

<b>Weight</b>	197,00 g
<b>Operating temperature range (min, max)</b>	-40°C...+125°C

#### Material properties

<b>Colour</b>	RAL 9005 black
<b>RoHs conformity</b>	Compliant
<b>China RoHs - EFUP</b>	E
<b>REACH SVHC substances</b>	No

#### Approvals / Standards

<b>Certifications</b>	DNV, BV
<b>UL</b>	ECBT2
<b>cUL</b>	ECBT8

#### General ordering information

<b>EAN13 code</b>	8015747194303
<b>eCl@ss 8.1</b>	27440202
<b>ETIM 7.0</b>	EC000437

#### Packaging Information


<b>Sub-packaging weight</b>	0,99 kg
<b>Sub-packaging description</b>	Plastic packaging
<b>Sub-packaging quantity</b>	5 Pcs
<b>Sub-packaging EAN barcode</b>	8015747194310

Part number

# MHON 24.32



Catalogue drawings

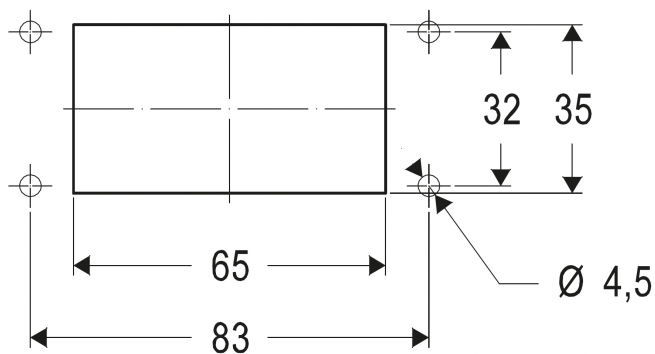

Catalogue drawings

**CH.N - MA, MF..N enclosures** size "104.27" **LS-TYPE version**

inserts:	page	housings with double lever	hoods with 4 pegs
CD	64 poles + @ 51-53 *		
CT, CTS (**)	64 poles + @ 57 *		
CDP	108 poles + @ 64-66 *		
CDE	48 poles + @ 83-85 *		
CSH	24 poles + @ 91-93 *		
CCE	24 poles + @ 100-104 *		
CNE, CSE, JONE, JCSE	24 poles + @ 101 and 103 *		
CSS	24 poles + @ 122-153 *		
CTE, CTSE (**)	24 poles + @ 129 *		
CMSE	10+2 (aux) poles + @ 139 *		
CMCE	10+2 (aux) poles + @ 138 *		
CA	48 poles + @ 155 *		
MIKO	6 modules 160-165 *		

insert centre distance: 104 x 27 mm  
\* refer to catalogue page CN.12

description	part no.	entry	part no.	entry
bulkhead mounting housing, with 2 levers	CHIN 24	M		
surface mounting housing, high construction, with 2 levers	MAPN 24.32	32		
with pegs, side entry			MHON 24.32	32
with pegs, side entry, high construction			MFON 24.32	32
with pegs, side entry			MHVN 24.32	32
with pegs, side entry, high construction			MFVN 24.32	32

**\*\* only in the CHIN 24 enclosure**

panel cut-out for bulkhead mounting housing in mm

- kin powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

IP65

dimensions shown are not binding and may be changed without notice

10

## Notes

Dimensions shown in mm are not binding and may be changed without notice.