Part number

MZAP 25LS225





Surface mounting housing, IL-BRID series, with 1 lever, M25 x 2 cable entry, size "66.16", high construction, with metal cover

| Product description | | Material properties |
|--|-------------------------------------|-----------------------|
| Product type | Surface mounting housing | Other materials |
| Series | IL-BRID | Colour |
| Closing type | With 1 lever | RoHs conformity |
| Size | Size "66.16" | China RoHs - EFUP |
| Cable entry | With cable entry | REACH SVHC substar |
| | M25 x 2 | Approvals / Standard |
| Specification | High construction, with metal cover | UL |
| Technical data | | cUL |
| IP degree of protection | IP65 / IP66 / IP69 | General ordering info |
| Further technical details | | EAN13 code |
| Weight | 253,00 g | eCl@ss 8.1 |
| Operating temperature range (min, max) | -40°C+125°C | ETIM 7.0 |
| range (mm, max) | | |


| Other materials | Lever: Polyamide (PA) and Stainless steel core | | |
|------------------------------|--|--|--|
| Colour | RAL 7040 grey | | |
| | • • | | |
| RoHs conformity | Compliant | | |
| China RoHs - EFUP | E | | |
| REACH SVHC substances | No | | |
| Approvals / Standards | | | |
| UL | ECBT2 | | |
| cUL | ECBT8 | | |
| General ordering information | | | |
| EAN13 code | 8015747060042 | | |
| eCl@ss 8.1 | 27440202 | | |
| ETIM 7.0 | EC000437 | | |
| Packaging Information | | | |
| Packaging length | 190,00 mm | | |
| Packaging height | 125,00 mm | | |
| Packaging width | 330,00 mm | | |
| Packaging weight | 2,60 kg | | |
| Packaging volume | 7,84 dm³ | | |
| Packaging description | Carton box | | |
| Packaging quantity | 10 Pcs | | |
| Packaging EAN code | 8015747060059 | | |
| | | | |

Part number

MZAP 25LS225



Catalogue drawings

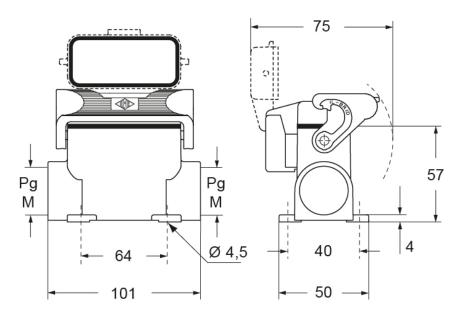

Notes

Dimensions shown in mm are not binding and may be changed without notice.