

Part number

PB 16123 PV



Mobile socket outlet, PLUSO series, 3 poles,
12 h (white), 16 A, 40 ÷ 50 V

Product description		Material properties	
Product type	Socket Mobile	Colour	RAL 7035 grey, RAL 9010 white
Series	PB...PV, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles	China RoHs - EFUP	50
Clock position	12	REACH SVHC substances	Yes Lead
Technical data		SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Current	16 A	Approvals / Standards	
Voltage	40 ÷ 50 V	Reference standard	EN 60309-1 and -2
IP degree of protection	IP44	General ordering information	
Further technical details		EAN13 code	8015747061568
Weight	154,50 g	Packaging Information	
Operating temperature range (min, max)	-25°C ... +40°C	Sub-packaging length	175,00 mm
		Sub-packaging height	100,00 mm
		Sub-packaging width	235,00 mm
		Sub-packaging weight	1,55 kg
		Sub-packaging volume	4,11 dm ³
		Sub-packaging description	Carton box
		Sub-packaging quantity	10 Pcs
		Sub-packaging EAN barcode	8015747061575


Part number

PB 16123 PV



Catalogue drawings

(16 / 32A) PB ... PV

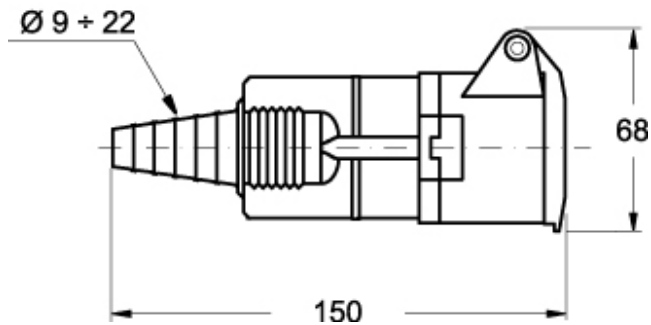

Notes

Dimensions shown in mm are not binding and may be changed without notice.

-
- Compliant with EN 60309-1 and -2
 - Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
 - RAL 7035 grey enclosure
 - Spring lid colour coded according to the operating voltage and frequency
 - Wall-mounting types PB...PP, top entry with threaded grommet (replaceable with cable gland)
 - Flush-mounting types PB...PI, flange with anti-aging gasket
 - Coupler types PB...PV, cable anchoring collar incorporated in the insert, entry with grommet
 - Terminals with retained screws
 - Nickel-plated contacts on request
 - IP44 degree of protection (EN 60529)
-