


Part number

PE 1644 PQ



Flush-mounting socket outlet, PLUSO series, 3 poles + PE, 4 h (yellow), 16 A, 100 ÷ 130 V, straight

Product description		Material properties	
Product type	Socket Flush-mounting	Colour	RAL 7035 grey, RAL 1021 yellow
Series	PE...PQ, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + 	China RoHs - EFUP	50
Clock position	4	REACH SVHC substances	Yes
Size	Socket fixing centre distance 52 x 52 mm	Lead	Lead
Specification	Straight	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Technical data		Approvals / Standards	
Current	16 A	Reference standard	EN 60309-1 and -2
Voltage	100 ÷ 130 V	General ordering information	
IP degree of protection	IP44	EAN13 code	8015747063975
Further technical details		Packaging Information	
Weight	130,00 g	Packaging length	285,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging height	170,00 mm
		Packaging width	190,00 mm
		Packaging weight	1,50 kg
		Packaging volume	9,21 dm ³
		Packaging description	Carton box
		Packaging quantity	10 Pcs
		Packaging EAN code	8015747063982


Part number

PE 1644 PQ



Catalogue drawings

(16 / 32A) PE ... PQ

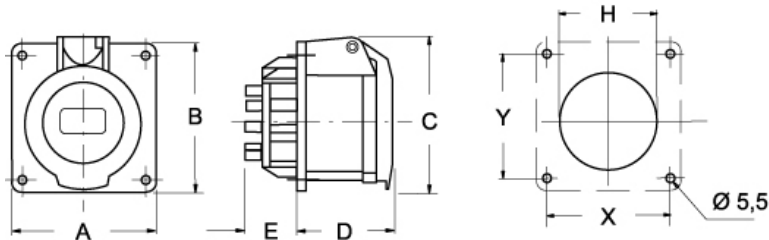

PE ... PQ		A	B	C	D	E	H	X	Y
16A	2P+⊕	65	65	71	52	27	60	52	52
	3P+⊕	65	65	75	53	27	61,5	52	52
	3P+N+⊕	80	80	86	53	27	70	60	60
32A	2P+⊕	80	80	87	62	28	68	60	60
	3P+⊕	80	80	87	62	28	68	60	60
	3P+N+⊕	80	80	92	62	28	73	60	60

Notes

Dimensions shown in mm are not binding and may be changed without notice.

-
- Compliant with EN 60309-1 and -2
 - Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
 - RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
 - Flange with anti-ageing gasket
 - PE...PQ types (IP44), spring lid
 - PEW...PQ types (IP67), spring lid with locking ring and gasket
 - Terminals with retained screws
 - 63A, 125A: with pilot contact
 - Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
 - IP44 and IP67 degrees of protection (EN 60529)
-