

Part number

PEW 12565 PV



Mobile socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 125 A, 380 ÷ 415 V

Product description

Product type	Socket Mobile
Series	PEW...PV, PLUSO
Connection type	Screw terminal connection
N. of poles	3 poles + N + 
Clock position	6

Technical data

Current	125 A
Voltage	380 ÷ 415 V
IP degree of protection	IP67

Further technical details

Weight	1.994,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747070591
-------------------	---------------

Packaging Information

Packaging length	330,00 mm
Packaging height	170,00 mm
Packaging width	230,00 mm
Packaging weight	4,47 kg
Packaging volume	12,90 dm ³
Packaging description	Carton box
Packaging quantity	2 Pcs
Packaging EAN code	8015747192842
Sub-packaging weight	2,24 kg
Sub-packaging description	Plastic packaging
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747070614


Part number

PEW 12565 PV



Catalogue drawings

(63 / 125A) PEW ... PV

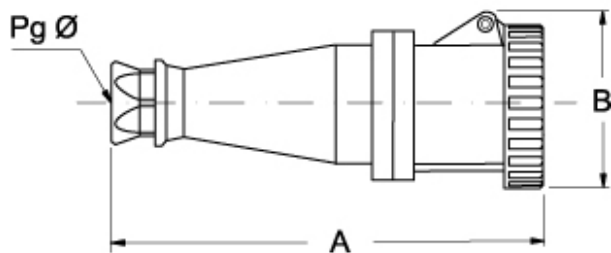

PEW ... PV		A	B	Pg Ø
63A	2P+⊕	277	108,5	36
	3P+⊕	277	108,5	36
	3P+N+⊕	277	108,5	36
125A	2P+⊕	324	120,5	2" gas
	3P+⊕	324	120,5	2" gas
	3P+N+⊕	324	120,5	2" gas

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...PV)