

Part number

RX 20S IM



Male modular insert, Mixo series, crimp connection, 20 poles, 1 module, 4 A 32 V 0,8 kV 3, shielded, HNM - High Number of Matings version


Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate (PC)
Series	Mixo	Other materials	Shield: zinc alloy
Connection type	Crimp connection	Colour	RAL 7032 grey
Gender	Male	RoHs conformity	Compliant
N. of poles	20 poles	China RoHs - EFUP	E
Size	1 module	REACH SVHC substances	No
Specification	HNM - High Number of Matings version Shielded	General ordering information	
Technical data		EAN13 code	8015747275743
Current	4 A	eCl@ss 8.1	27440205
Voltage	32 V	ETIM 7.0	EC000438
Rated impulse withstand voltage	0,8 kV	Packaging Information	
Pollution degree	3	Packaging weight	0,44 kg
Rated voltage according to UL/CSA	32 V	Packaging volume	1,24 dm ³
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Packaging description	Carton box
Further technical details		Packaging quantity	10 Pcs
Characteristics according to EN 61984	4 A 32 V 0,8 kV 3	Packaging EAN code	8015747275767
Mating cycles	≥ 10000	Sub-packaging length	116,00 mm
Insulation resistance	≥ 10 GΩ	Sub-packaging height	113,00 mm
Contact resistance	≤ 4 mΩ	Sub-packaging width	142,00 mm
Weight	39,50 g	Sub-packaging weight	0,04 kg
Operating temperature range (min, max)	-40°C ... +85°C	Sub-packaging volume	1,86 dm ³
UL 94 flammability rating	V-0	Sub-packaging description	Plastic bag
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747275750

Part number

RX 20S IM



Catalogue drawings

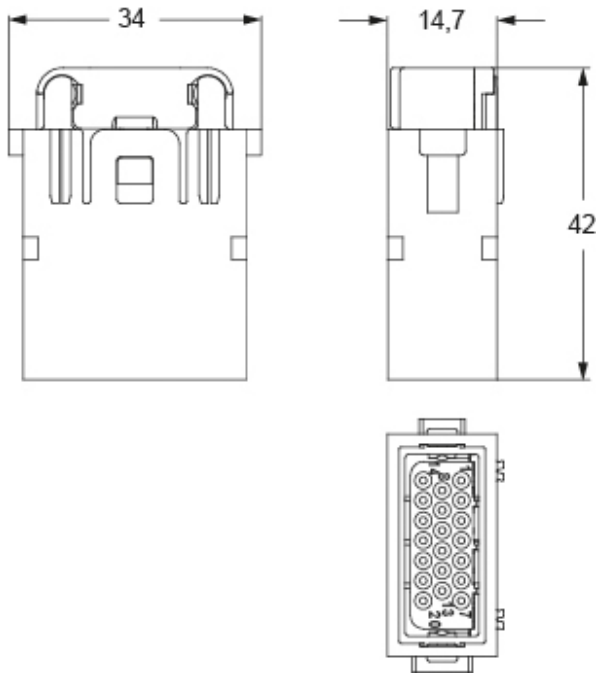

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.