

Part number

CIF2D 0.5



Female crimp contact, CI series, 5 A, turned gold plated, wire cross section 0,33 - 0,52 mm², AWG 22 - 20, high thickness gold plating


Product description		Material properties	
Product type	Crimp contact	Main material	Copper alloy
Series	CI		Compliant with exemption
Gender	Female	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Specification	High thickness gold plating	China RoHs - EFUP	50
Technical data		REACH SVHC substances	Yes
Current	5 A		Lead
Wire cross-section	0,33 mm ² - 0,52 mm ²	SCIP number	C0979fba-9907-458f-a94a-db781440f273
AWG size	22 - 20	Approvals / Standards	
Contact type	Turned gold plated	Certifications	CSA, EAC
Further technical details		UL	ECBT2
Mating cycles	≥ 500	General ordering information	
Contact resistance	≤ 4 mΩ	EAN13 code	8015747276832
Weight	0,21 g	eCl@ss 8.1	27440204
Conductors stripping length	4 mm	ETIM 7.0	EC000796
Packaging Information			
Packaging weight	0,26 kg	Packaging description	Carton box
Packaging description	Carton box	Packaging quantity	1000 Pcs
Packaging quantity	1000 Pcs	Packaging EAN code	8015747122177
Packaging EAN code	8015747122177	Sub-packaging length	75,00 mm
Sub-packaging length	75,00 mm	Sub-packaging height	89,00 mm
Sub-packaging height	89,00 mm	Sub-packaging width	110,00 mm
Sub-packaging width	110,00 mm	Sub-packaging volume	0,73 dm ³
Sub-packaging volume	0,73 dm ³	Sub-packaging description	Plastic bag
Sub-packaging description	Plastic bag	Sub-packaging quantity	25 Pcs
Sub-packaging quantity	25 Pcs	Sub-packaging EAN barcode	8015747163996
Sub-packaging EAN barcode	8015747163996		

Part number

CIF2D 0.5



Catalogue drawings

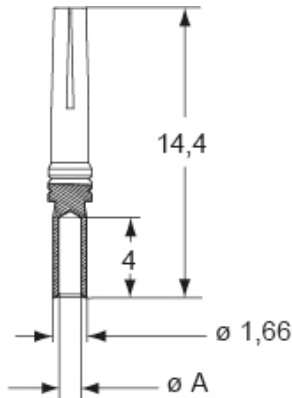

CIF2D and CIM2D contacts

conductor section (mm ²)	conductor slot ø A (mm)	conductors stripping length (mm)
0,08-0,21	0,64	4
0,13-0,33	0,90	4
0,33-0,52	1,12	4
0,52-0,75	1,12	4

Notes

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.