

Part number

CX7MA 16 P



Male crimp contact, CX7 series, 70 A, turned silver plated, wire cross section 16 mm², AWG 6 - 5, finger-proof version


Product description		Material properties	
Product type	Crimp contact	Main material	Copper alloy
Series	CX7	Other materials	Cap: polycarbonate (PC)
Gender	Male		Compliant with exemption
Specification	Finger-proof version	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Technical data		China RoHs - EFUP	50
Current	70 A	REACH SVHC substances	Yes
Wire cross-section	16,00 mm ²		Lead
AWG size	6 - 5	SCIP number	C0979fba-9907-458f-a94a-db781440f273
Contact type	Turned silver plated	Approvals / Standards	
Further technical details		Certifications	EAC
Mating cycles	≥ 500	UL	ECBT2
Contact resistance	≤ 0,5 mΩ	cUL	ECBT8
Weight	9,17 g	General ordering information	
Operating temperature range (min, max)	-40°C ... +125°C	EAN13 code	8015747279161
Conductors stripping length	15 mm	eCl@ss 8.1	27440204
		ETIM 7.0	EC000796
Packaging Information			
Sub-packaging length			50,00 mm
Sub-packaging height			44,00 mm
Sub-packaging width			50,00 mm
Sub-packaging weight			0,15 kg
Sub-packaging volume			0,11 dm ³
Sub-packaging description			Plastic box
Sub-packaging quantity			16 Pcs
Sub-packaging EAN barcode			8015747279215

Part number

CX7MA 16 P



Catalogue drawings

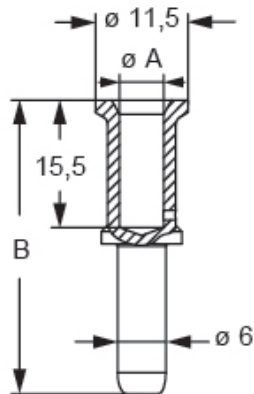

CX7MA .. P contacts

part No.	Ø A (mm)	B (mm)	stripping length (mm)
CX7MA 6.0 P	3,5	36,6	15
CX7MA 10 P	4,3	35,8	15
CX7MA 16 P	5,5	35,8	15
CX7MA 25 P	7,0	35,8	15

Notes

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.