Part number

MFON 16.32

Hood, LS-TYPE series, with 4 pegs, M32 side cable entry without adapter, size "77.27", high construction

Product description	
Product type	Hood
Series	LS-TYPE
Closing type	With 4 pegs
Size	Size 77.27
Cable entry	Side cable entry M32
Specification	High construction
Technical data	
IP degree of protection	IP65
Further technical details	
Weight	258,00 g
Operating temperature range (min, max)	-40°C...+125°C

Material properties	
Colour	RAL 9005 black
RoHs conformity	Compliant
China RoHs - EFUP	E
REACH SVHC substances	No
Approvals / Standards	
Certifications	DNV, BV
UL	ECBT2
cUL	ECBT8
General ordering information	
EAN13 code	8015747044295
eCl@ss 8.1	27440202
ETIM 7.0	EC000437
Packaging Information	
Packaging length	190,00 mm
Packaging height	140,00 mm
Packaging width	290,00 mm
Packaging weight	5,26 kg
Packaging volume	7,71 dm³
Packaging description	Carton box
Packaging quantity	20 Pcs
Packaging EAN code	8015747187732
Sub-packaging weight	1,32 kg
Sub-packaging description	Plastic packaging
Sub-packaging quantity	5 Pcs
Sub-packaging EAN barcode	8015747187749

Part number

MFON 16.32

Catalogue drawings



Catalogue drawings

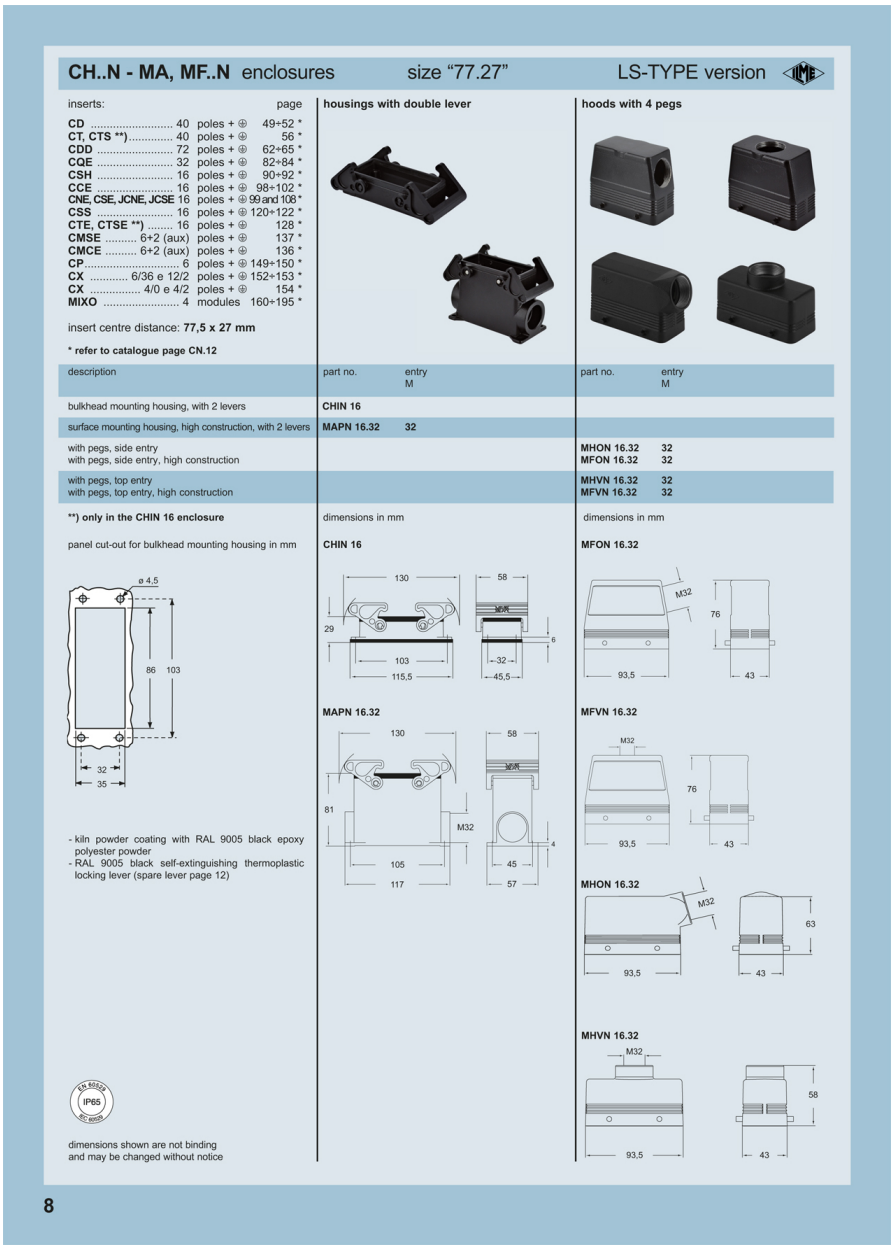

CH..N - MA, MF..N enclosures size “77.27” LS-TYPE version

inserts: page

CD	40	poles + ⊕	49÷52 *
CT, CTS **)	40	poles + ⊕	56 *
CDD	72	poles + ⊕	62÷65 *
CQE	32	poles + ⊕	82÷84 *
CSH	16	poles + ⊕	90÷92 *
CCE	16	poles + ⊕	98÷102 *
CNE, CSE, JCNE, JCSE	16	poles + ⊕	99 and 108 *
CSS	16	poles + ⊕	120÷122 *
CTE, CTSE **)	16	poles + ⊕	128 *
CMSE	6+2 (aux)	poles + ⊕	137 *
CMCE	6+2 (aux)	poles + ⊕	136 *
CP	6	poles + ⊕	149÷150 *
CX	6/36 e 12/2	poles + ⊕	152÷153 *
CX	4/0 e 4/2	poles + ⊕	154 *
MIXO	4	modules	160÷195 *

insert centre distance: **77,5 x 27 mm**

*** refer to catalogue page CN.12**

housings with double lever

hoods with 4 pegs

description	part no.	entry M	part no.	entry M
bulkhead mounting housing, with 2 levers	**CHIN 16**			
surface mounting housing, high construction, with 2 levers	**MAPN 16.32**	**32**		
with pegs, side entry with pegs, side entry, high construction			**MHON 16.32** **MFON 16.32**	**32** **32**
with pegs, top entry with pegs, top entry, high construction			**MHVN 16.32** **MFVN 16.32**	**32** **32**

****) only in the CHIN 16 enclosure**

panel cut-out for bulkhead mounting housing in mm

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

IP65

dimensions shown are not binding and may be changed without notice

dimensions in mm

CHIN 16

MAPN 16.32

dimensions in mm

MFON 16.32

MFVN 16.32

MHON 16.32

MHVN 16.32

8

Notes