Part number MMAP 16 L240






Surface mounting housing, 830V series, with 1 lever, M40 x 2 cable entry, size "104.27", high construction

| Product description | |
|---|-----------------------------|
| Product type | Surface mounting housing |
| Series | 830V |
| Closing type | With 1 lever |
| Size | Size "104.27" |
| Cable entry | With cable entry M40 x 2 |
| Specification | High construction |
| Technical data | |
| IP degree of protection | IP65 / IP66 / IP69 |
| Further technical details | |
| Weight | 425,00 g |
| Operating temperature range (min, max) | -40°C+125°C |
| | |


| Material properties | | |
|------------------------------|-------------------|--|
| Colour | RAL 7040 grey | |
| RoHs conformity | Compliant | |
| China RoHs - EFUP | E | |
| REACH SVHC substances | No | |
| Approvals / Standards | | |
| Certifications | DNV, BV | |
| UL | ECBT2 | |
| cUL | ECBT8 | |
| General ordering information | | |
| EAN13 code | 8015747057721 | |
| Packaging Information | | |
| Sub-packaging weight | 2,13 kg | |
| Sub-packaging description | Plastic packaging | |
| Sub-packaging quantity | 5 Pcs | |
| Sub-packaging EAN barcode | 8015747106566 | |






Catalogue drawings

CMPL CMAPL-MMPL MMAPL

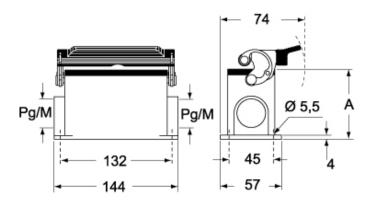

CMP LS CMAP LS - MMP LS MMAP LS

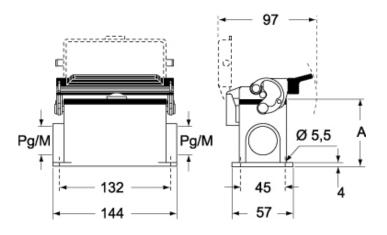

| | Α |
|-------------------|----|
| CMP L / MMP L | 63 |
| CMAP L / MMAP L | 80 |
| CMP LS / MMP LS | 63 |
| CMAP LS / MMAP LS | 80 |
| | |

Notes