Codice articolo

MFVN 16.32

Custodia mobile, serie LS-TYPE, con 4 piolini, ingresso cavo verticale M32 senza adattatore, grandezza "77.27", alta

Descrizione prodotto	
Tipo prodotto	Custodia mobile
Serie	LS-TYPE
Tipo chiusura	Con 4 piolini
Grandezza	Grandezza "77.27"
Ingresso cavo	Ingresso cavo verticale M32
Specifica	Alta
Dati tecnici	
Grado di protezione IP	IP65
Ulteriori dettagli tecnici	
Peso	257,00 g
Temperature di esercizio (min, max)	-40°C...+125°C

Proprietà dei materiali	
Colore	Nero RAL 9005
Conformità RoHs	Conforme
China RoHs - EFUP	E
Sostanze REACH SVHC	No
Approvazioni / Normative	
Certificazioni	DNV, BV
UL	ECBT2
cUL	ECBT8
Informazioni commerciali	
Codice EAN13	8015747163590
Classificazione ecl@ss	27440202
Classificazione ETIM	EC000437
Caratteristiche imballaggio	
Lunghezza imballo	310,00 mm
Altezza imballo	175,00 mm
Profondità imballo	205,00 mm
Peso imballo	5,49 kg
Volume imballo	11,12 dm³
Descrizione imballo	Scatola cartone
Quantità imballo	20 pz
Codice EAN13 imballo	8015747187800
Peso sottoimballo	1,37 kg
Descrizione sottoimballo	Termoretraibile
Quantità sottoimballo	5 pz
Codice EAN13 sottoimballo	8015747187817

Codice articolo

MFVN 16.32

Disegni da catalogo



Disegni da catalogo

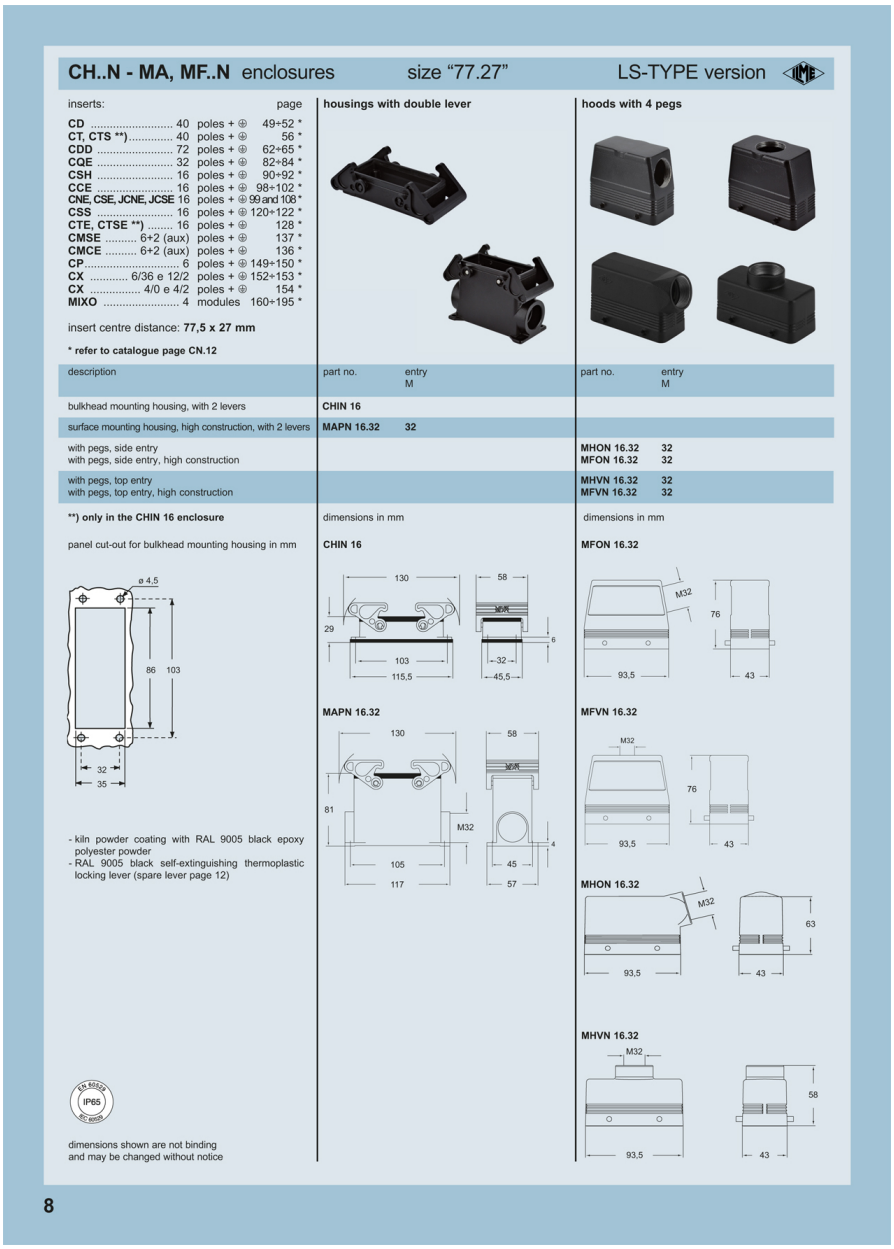

CH..N - MA, MF..N enclosures size “77.27” LS-TYPE version

inserts: page

CD	40	poles + ⊕	49÷52 *
CT, CTS **)	40	poles + ⊕	56 *
CDD	72	poles + ⊕	62÷65 *
CQE	32	poles + ⊕	82÷84 *
CSH	16	poles + ⊕	90÷92 *
CCE	16	poles + ⊕	98÷102 *
CNE, CSE, JCNE, JCSE	16	poles + ⊕	99 and 108 *
CSS	16	poles + ⊕	120÷122 *
CTE, CTSE **)	16	poles + ⊕	128 *
CMSE	6+2 (aux)	poles + ⊕	137 *
CMCE	6+2 (aux)	poles + ⊕	136 *
CP	6	poles + ⊕	149÷150 *
CX	6/36 e 12/2	poles + ⊕	152÷153 *
CX	4/0 e 4/2	poles + ⊕	154 *
MIXO	4	modules	160÷195 *

insert centre distance: **77,5 x 27 mm**

*** refer to catalogue page CN.12**

housings with double lever

hoods with 4 pegs

description	part no.	entry M	part no.	entry M
bulkhead mounting housing, with 2 levers	**CHIN 16**			
surface mounting housing, high construction, with 2 levers	**MAPN 16.32**	**32**		
with pegs, side entry with pegs, side entry, high construction			**MHON 16.32** **MFON 16.32**	**32** **32**
with pegs, top entry with pegs, top entry, high construction			**MHVN 16.32** **MFVN 16.32**	**32** **32**

****) only in the CHIN 16 enclosure**

panel cut-out for bulkhead mounting housing in mm

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

IP65

dimensions shown are not binding and may be changed without notice

dimensions in mm

CHIN 16

MAPN 16.32

dimensions in mm

MFON 16.32

MFVN 16.32

MHON 16.32

MHVN 16.32

8

Note

Le misure indicate non sono impegnative e possono essere variate senza alcun preavviso.