品番

MFVN 24.32

フード, LS-タイプ シリーズ, 4ペグ付, M32 トップエントリーアダプタ無し, サイズ "104.27", ハイコンストラクション

製品説明	
製品タイプ	フード
シリーズ	LS-タイプ
クロージングタイプ	4ペグ付
サイズ	サイズ"104.27"
ケーブルエントリー	トップケーブルエントリー アダプタ無し M32
仕様	ハイコンストラクション
技術データ	
IP 保護等級	IP65
技術詳細	
動作温度範囲（最小・最大）	-40°C...+125°C

材料特性	
カラー	RAL 9005
認証 / 規格	
認証	DNV, BV
UL	ECBT2
cUL	ECBT8
ジェネラルオーダリングインフォメーション	
EAN13 コード	8015747163606
ecl@ss 分類	27440202
ETIM 分類	EC000437
パッケージ情報	
サブパッケージ 詳細	プラスチック包装
サブパッケージ 数量	5 個
サブパッケージ EAN バーコード	8015747187824

品番

MFVN 24.32

カタログ図面



カタログ図面

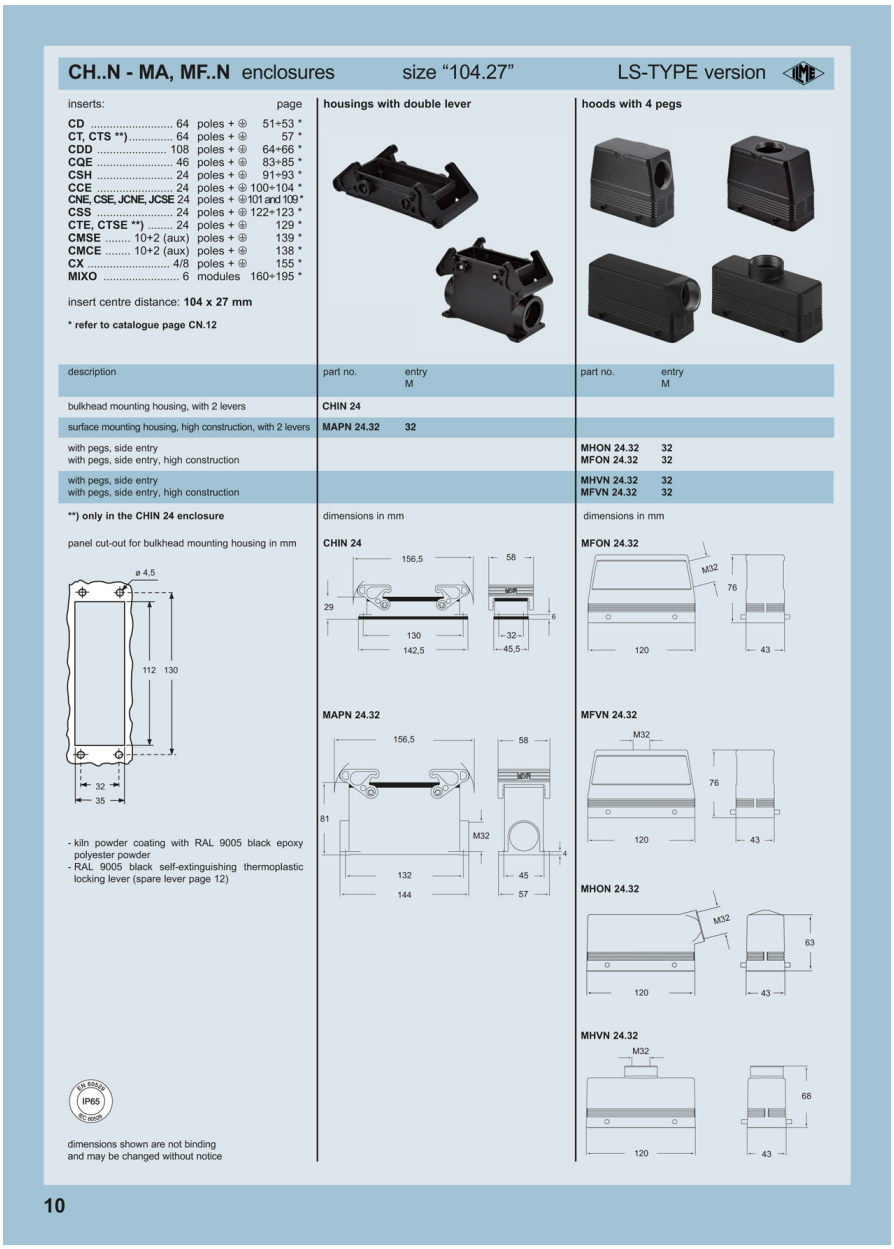

CH..N - MA, MF..N enclosures size “104.27” LS-TYPE version

inserts: page

CD	64	poles + ⊕	51÷53 *
CT, CTS **)	64	poles + ⊕	57 *
CDD	108	poles + ⊕	64÷66 *
CQE	46	poles + ⊕	83÷85 *
CSH	24	poles + ⊕	91÷93 *
CCE	24	poles + ⊕	100÷104 *
CNE, CSE, JCNE, JCSE	24	poles + ⊕	101 and 109 *
CSS	24	poles + ⊕	122÷123 *
CTE, CTSE **)	24	poles + ⊕	129 *
CMSE	10+2 (aux)	poles + ⊕	139 *
CMCE	10+2 (aux)	poles + ⊕	138 *
CX	4/8	poles + ⊕	155 *
MIXO	6	modules	160÷195 *

insert centre distance: **104 x 27 mm**

*** refer to catalogue page CN.12**

housings with double lever

hoods with 4 pegs

description	part no.	entry M	part no.	entry M
bulkhead mounting housing, with 2 levers	**CHIN 24**			
surface mounting housing, high construction, with 2 levers	**MAPN 24.32**	**32**		
with pegs, side entry with pegs, side entry, high construction			**MHON 24.32** **MFON 24.32**	**32** **32**
with pegs, side entry with pegs, side entry, high construction			**MHVN 24.32** **MFVN 24.32**	**32** **32**

****) only in the CHIN 24 enclosure**

panel cut-out for bulkhead mounting housing in mm

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

IP65

dimensions shown are not binding and may be changed without notice

dimensions in mm

CHIN 24

MAPN 24.32

dimensions in mm

MFON 24.32

MFVN 24.32

MHON 24.32

MHVN 24.32

10

メモ

mmで示されている寸法は拘束力がなく、予告なく変更される場合があります。