品番

MHVN 16.32

フード, LS-タイプ シリーズ, 4ペグ付, M32 トップエントリー , サイズ "77.27"

製品説明	
製品タイプ	フード
シリーズ	LS-タイプ
クロージングタイプ	4ペグ付
サイズ	サイズ"77.27"
ケーブルエントリー	トップケーブルエントリー アダプタ無し M32
技術データ	
IP 保護等級	IP65
技術詳細	
重さ	126,00 g
動作温度範囲（最小・最大）	-40°C...+125°C

材料特性	
カラー	RAL 9005
認証 / 規格	
認証	DNV, BV
UL	ECBT2
cUL	ECBT8
ジェネラルオーダリングインフォメーション	
EAN13 コード	8015747194280
ecl@ss 分類	27440202
ETIM 分類	EC000437
パッケージ情報	
サブパッケージ 重量	0,63 kg
サブパッケージ 詳細	プラスチック包装
サブパッケージ 数量	5 個
サブパッケージ EAN バーコード	8015747194297

品番

MHVN 16.32

カタログ図面



カタログ図面

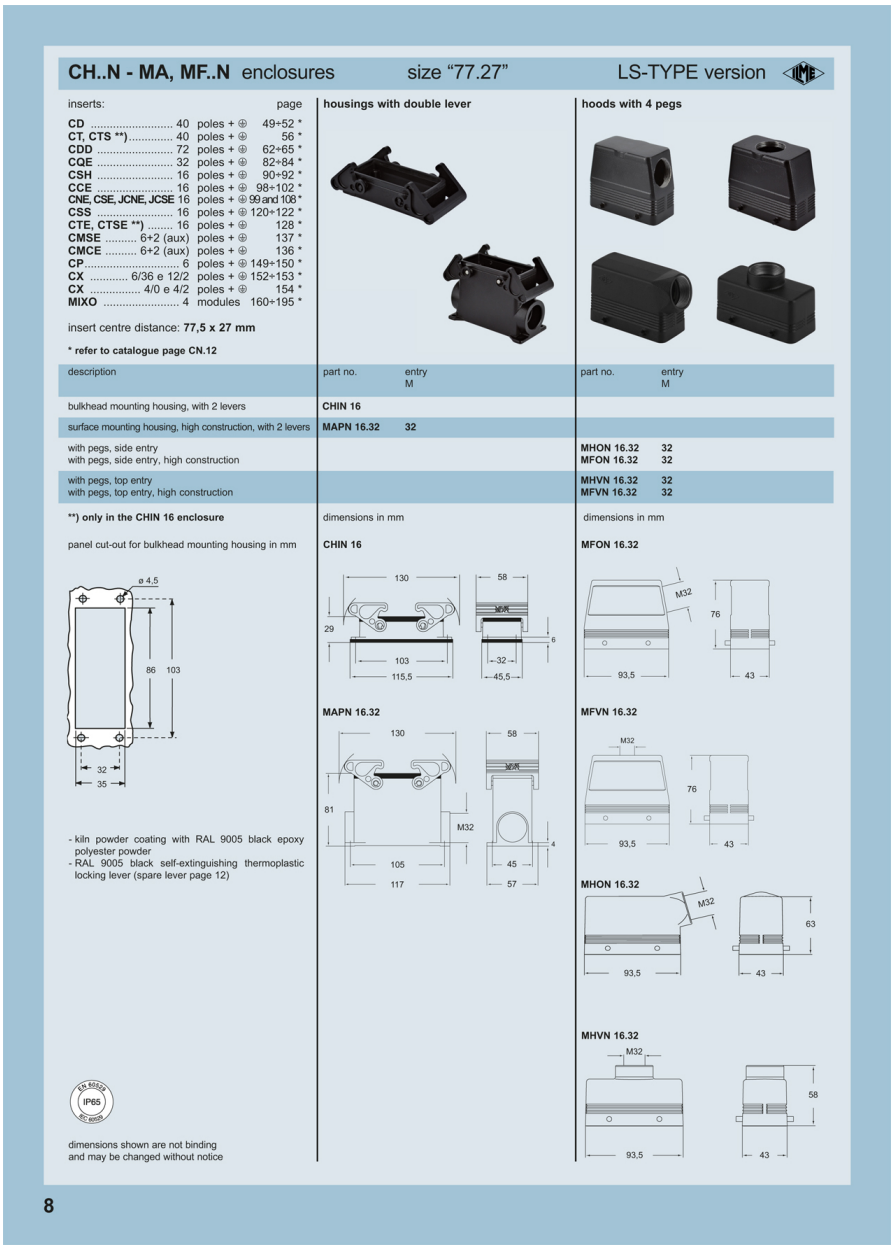

CH..N - MA, MF..N enclosures size “77.27” LS-TYPE version

inserts: page

CD	40	poles + ⊕	49÷52 *
CT, CTS **)	40	poles + ⊕	56 *
CDD	72	poles + ⊕	62÷65 *
CQE	32	poles + ⊕	82÷84 *
CSH	16	poles + ⊕	90÷92 *
CCE	16	poles + ⊕	98÷102 *
CNE, CSE, JCNE, JCSE	16	poles + ⊕	99 and 108 *
CSS	16	poles + ⊕	120÷122 *
CTE, CTSE **)	16	poles + ⊕	128 *
CMSE	6+2 (aux)	poles + ⊕	137 *
CMCE	6+2 (aux)	poles + ⊕	136 *
CP	6	poles + ⊕	149÷150 *
CX	6/36 e 12/2	poles + ⊕	152÷153 *
CX	4/0 e 4/2	poles + ⊕	154 *
MIXO	4	modules	160÷195 *

insert centre distance: **77,5 x 27 mm**

*** refer to catalogue page CN.12**

housings with double lever

hoods with 4 pegs

description	part no.	entry M	part no.	entry M
bulkhead mounting housing, with 2 levers	**CHIN 16**			
surface mounting housing, high construction, with 2 levers	**MAPN 16.32**	**32**		
with pegs, side entry with pegs, side entry, high construction			**MHON 16.32** **MFON 16.32**	**32** **32**
with pegs, top entry with pegs, top entry, high construction			**MHVN 16.32** **MFVN 16.32**	**32** **32**

****) only in the CHIN 16 enclosure**

panel cut-out for bulkhead mounting housing in mm

- kiln powder coating with RAL 9005 black epoxy polyester powder
- RAL 9005 black self-extinguishing thermoplastic locking lever (spare lever page 12)

IP65

dimensions shown are not binding and may be changed without notice

dimensions in mm

CHIN 16

MAPN 16.32

dimensions in mm

MFON 16.32

MFVN 16.32

MHON 16.32

MHVN 16.32

8

メモ

mmで示されている寸法は拘束力がなく、予告なく変更される場合があります。