


Part number

CIF Q08 1.6



Interface for printed circuit, 8 poles, for up to 1.6 mm thick PCB



Product description		Material properties	
Product type	Interface for printed circuit	Main material	Polycarbonate (PC)
N. of poles	8 poles	Other materials	Contacts: copper alloy
Specification	For CQ 08 inserts For up to 1.6 mm thick PCB	Colour	RAL 7032 grey
Technical data		RoHS conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Current	16 A	China RoHS - EFUP	50
Voltage	230 - 400 V	REACH SVHC substances	Yes
Rated impulse withstand voltage	4 kV	Lead	
Pollution degree	2	SCIP number	022a8a72-7a4c-443a-a1ad-2461ccc7884c
Contact type	Turned silver plated	Approvals / Standards	
Further technical details		Certifications	DNV
Characteristics according to EN 61984	16A 230/400V 4kV 2	UL	ECBT2
Contact resistance	≤ 3 mΩ	cUL	ECBT8
Weight	15,00 g	General ordering information	
Operating temperature range (min, max)	-40°C...+125°C	EAN13 code	8015747252263
UL 94 flammability rating	UL 94 V-0	eCl@ss 8.1	27449290
		ETIM 7.0	EC002943
Packaging Information			
Packaging length	180,00 mm	Packaging weight	1,07 kg
Packaging height	120,00 mm	Packaging volume	3,35 dm ³
Packaging width	155,00 mm	Packaging description	Carton box
Packaging quantity	60 Pcs	Packaging EAN code	8015747252270
Sub-packaging length	35,00 mm	Sub-packaging height	40,00 mm
Sub-packaging height	40,00 mm	Sub-packaging width	155,00 mm
Sub-packaging width	155,00 mm	Sub-packaging weight	0,18 kg
Sub-packaging weight	0,18 kg	Sub-packaging volume	0,22 dm ³
Sub-packaging volume	0,22 dm ³	Sub-packaging description	Carton tray
Sub-packaging description	Carton tray	Sub-packaging quantity	10 Pcs
Sub-packaging quantity	10 Pcs	Sub-packaging EAN barcode	8015747252287

Part number

CIF Q08 1.6



Catalogue drawings

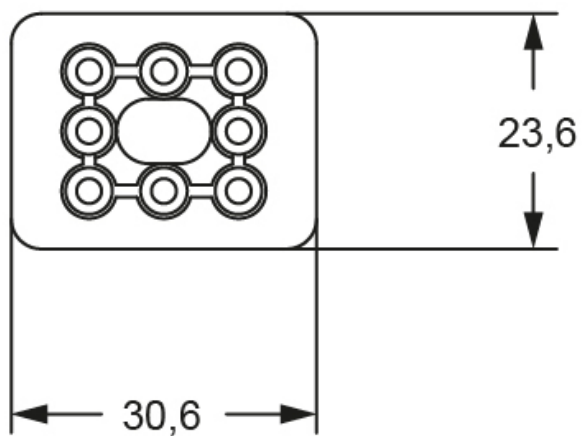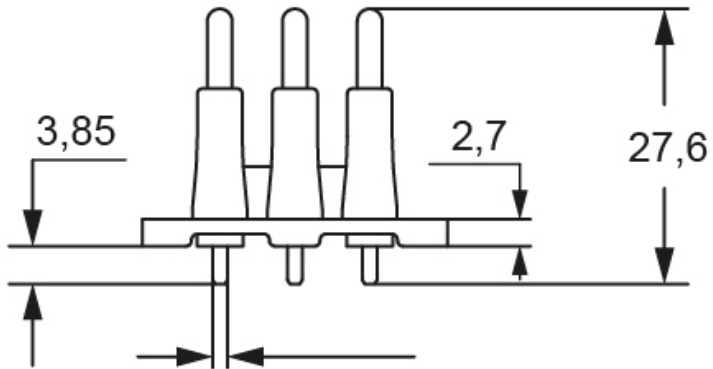

PCB-Layout

