

Part number

# MAF 24.25



Hood, C-TYPE series, with 4 pegs, M25 frontal cable entry, size "104.27", high construction

| Product description                    |                                      | Material properties          |                                                       |
|----------------------------------------|--------------------------------------|------------------------------|-------------------------------------------------------|
| Product type                           | Hood                                 | Colour                       | RAL 7040 grey                                         |
| Series                                 | C-TYPE                               |                              | Compliant with exemption                              |
| Closing type                           | With 4 pegs                          | RoHs conformity              | 6(c): copper alloy containing up to 4% lead by weight |
| Size                                   | Size "104.27"                        | China RoHs - EFUP            | 50                                                    |
| Cable entry                            | Frontal cable entry with adapter M25 | REACH SVHC substances        | Yes                                                   |
| Specification                          | High construction                    |                              | Lead                                                  |
| Technical data                         |                                      | SCIP number                  | 15deaf78-e939-4401-a0b0-e2228ca32a03                  |
| IP degree of protection                | IP65 / IP66 / IP69                   | Approvals / Standards        |                                                       |
| Further technical details              |                                      | Certifications               | DNV, BV                                               |
| Weight                                 | 288,00 g                             | UL                           | ECBT2                                                 |
| Operating temperature range (min, max) | -40°C...+125°C                       | cUL                          | ECBT8                                                 |
|                                        |                                      | General ordering information |                                                       |
|                                        |                                      | EAN13 code                   | 8015747050258                                         |
|                                        |                                      | eCl@ss 8.1                   | 27440202                                              |
|                                        |                                      | ETIM 7.0                     | EC000437                                              |
|                                        |                                      | Packaging Information        |                                                       |
|                                        |                                      | Sub-packaging weight         | 1,44 kg                                               |
|                                        |                                      | Sub-packaging description    | Plastic packaging                                     |
|                                        |                                      | Sub-packaging quantity       | 5 Pcs                                                 |
|                                        |                                      | Sub-packaging EAN barcode    | 8015747050265                                         |


Part number

# MAF 24.25



Catalogue drawings

**CHO [CAO] CHV (CAV) - MHO [MAO]  
MHV (MAV)**

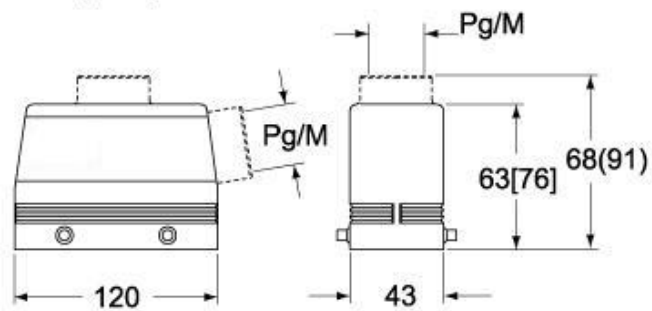

**CHV G (CAV G) - MHV G (MAV G) - [MFV G]**

