


Part number

# CQF 12 CIF

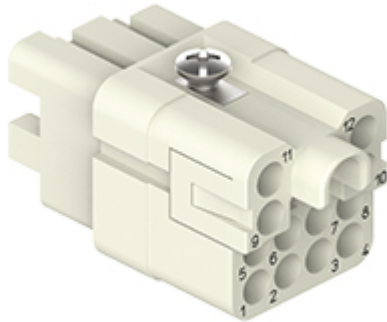

Female insert, CQ series, crimp connection, 12 poles + PE, 7,5 A 250 V 4 kV 3, size "21.21", for PCB adapter CIF Q12 2.4, PE contact pin diameter 1 mm

| Product description                    |                                                                                              | Material properties          |                                                                                |
|----------------------------------------|----------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                           | Insert                                                                                       | Main material                | Polycarbonate (PC)                                                             |
| Series                                 | CQ                                                                                           | Colour                       | RAL 7032 grey                                                                  |
| Connection type                        | Crimp connection                                                                             |                              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| Gender                                 | Female                                                                                       | RoHs conformity              |                                                                                |
| N. of poles                            | 12 poles +  | China RoHs - EFUP            | 50                                                                             |
| Size                                   | Size "21.21"                                                                                 | REACH SVHC substances        | Yes                                                                            |
| Specification                          | PE contact pin diameter 1 mm<br>For PCB adapter                                              | Lead                         |                                                                                |
|                                        |                                                                                              | SCIP number                  | 1a9c93ff-0445-4a16-81e3-1609ac5274d6                                           |
| Technical data                         |                                                                                              | Approvals / Standards        |                                                                                |
| Current                                | 7 A                                                                                          | Certifications               | DNV                                                                            |
| Voltage                                | 250 V                                                                                        | UL                           | ECBT2                                                                          |
| Rated impulse withstand voltage        | 4 kV                                                                                         | cUL                          | ECBT8                                                                          |
| Pollution degree                       | 3                                                                                            | General ordering information |                                                                                |
| IP degree of protection                | IP20 without enclosure, IP66/IP67/IP68/IP69 with enclosure                                   | EAN13 code                   | 8015747270694                                                                  |
|                                        |                                                                                              | eCl@ss 8.1                   | 27440205                                                                       |
|                                        |                                                                                              | ETIM 7.0                     | EC000438                                                                       |
| Further technical details              |                                                                                              | Packaging Information        |                                                                                |
| Characteristics according to EN 61984  | 7,5 A 250 V 4 kV 3                                                                           | Sub-packaging description    | Plastic bag                                                                    |
| Weight                                 | 12,00 g                                                                                      | Sub-packaging quantity       | 1 Pcs                                                                          |
| Operating temperature range (min, max) | -40 °C ... +125 °C                                                                           | Sub-packaging EAN barcode    | 8015747270717                                                                  |

Part number

# CQF 12 CIF



Catalogue drawings

