

Part number

# RVP 24 L25



Surface mounting housing, HNM - High Number of Matings series, with 1 lever, M25 cable entry, size "104.27"

#### Product description

|                     |                              |
|---------------------|------------------------------|
| <b>Product type</b> | Surface mounting housing     |
| <b>Series</b>       | HNM - High Number of Matings |
| <b>Closing type</b> | With 1 lever                 |
| <b>Size</b>         | Size "104.27"                |
| <b>Cable entry</b>  | With cable entry<br>M25      |

#### Technical data

|                                |                    |
|--------------------------------|--------------------|
| <b>IP degree of protection</b> | IP65 / IP66 / IP69 |
|--------------------------------|--------------------|

#### Further technical details

|                                               |                |
|-----------------------------------------------|----------------|
| <b>Operating temperature range (min, max)</b> | -40°C...+125°C |
|-----------------------------------------------|----------------|

#### Material properties

|                              |                                       |
|------------------------------|---------------------------------------|
| <b>Other materials</b>       | Lever: Stainless steel<br>Gasket: NBR |
| <b>Colour</b>                | RAL 7040 grey                         |
| <b>RoHs conformity</b>       | Compliant                             |
| <b>China RoHs - EFUP</b>     | E                                     |
| <b>REACH SVHC substances</b> | No                                    |

#### Approvals / Standards

|            |       |
|------------|-------|
| <b>UL</b>  | ECBT2 |
| <b>cUL</b> | ECBT8 |

#### General ordering information


|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747255844 |
| <b>eCl@ss 8.1</b> | 27440202      |
| <b>ETIM 7.0</b>   | EC000437      |

Part number

**RVP 24 L25**



Catalogue drawings

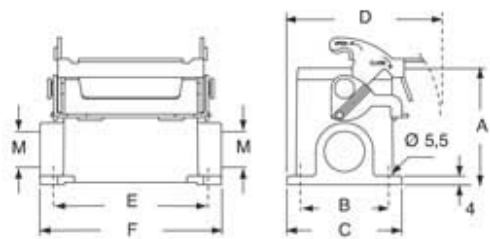

| type          | A  | B  | C  | D    | E   | F   |
|---------------|----|----|----|------|-----|-----|
| <b>RVP L</b>  | 63 | 45 | 57 | 75,5 | 132 | 144 |
| <b>RVAP L</b> | 80 | 45 | 57 | 75,5 | 132 | 144 |