


Part number

CTSEF 24 L

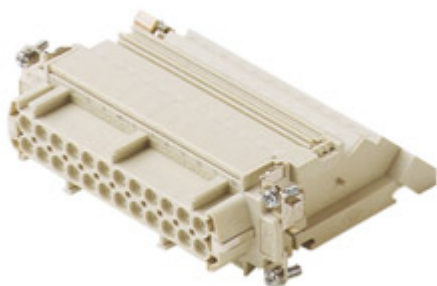

Female insert, CTSE series, spring terminal connection, 24 poles + PE, 16 A 500 V 6 kV 3, size "104.27", with incorporated terminal block, left side mounting





Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CTSE	Other materials	Contacts: copper alloy
Connection type	Spring terminal connection	Colour	RAL 7032 grey
Gender	Female	RoHS conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	24 poles + 	China RoHS - EFUP	50
Size	Size "104.27"	REACH SVHC substances	Yes Lead
Specification	Left side mounting With incorporated terminal block	SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Technical data		Approvals / Standards	
Current	16 A	Reference standard	EN 61984:2009-06
Voltage	500 V	Certifications	CSAc, CQC, DNV, BV, EAC
Rated impulse withstand voltage	6 kV	UL	ECBT2
Pollution degree	3	General ordering information	
Rated voltage according to UL/CSA	600 V	EAN13 code	8015747122399
Wire cross-section	0,14 mm ² - 2,50 mm ²	eCl@ss 8.1	27440205
AWG size	26 - 14	ETIM 7.0	EC000438
Contact type	Turned silver plated	Packaging Information	
IP degree of protection	IP20 without enclosure, IP66/IP69 with enclosure	Packaging weight	0,87 kg
Further technical details		Packaging description	Carton box
Characteristics according to EN 61984	16A 500V 6kV 3; 16A 400/690V 6kV 2	Packaging quantity	4 Pcs
Mating cycles	≥ 500	Packaging EAN code	8015747123679
Insulation resistance	≥ 10 GΩ	Sub-packaging length	145,00 mm
Contact resistance	≤ 4 mΩ	Sub-packaging height	89,00 mm
Weight	205,00 g	Sub-packaging width	120,00 mm
Operating temperature range (min, max)	-40 °C ... +125 °C	Sub-packaging weight	0,22 kg
Conductors stripping length	9...11 mm	Sub-packaging volume	1,55 dm ³
UL 94 flammability rating	V-0	Sub-packaging description	Plastic packaging
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747123686

Part number

CTSEF 24 L



Catalogue drawings

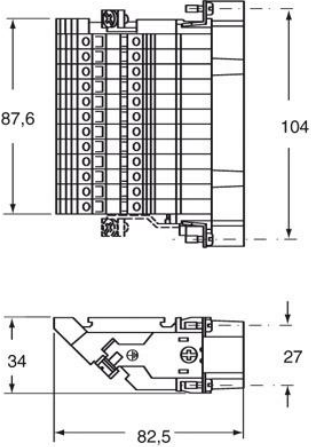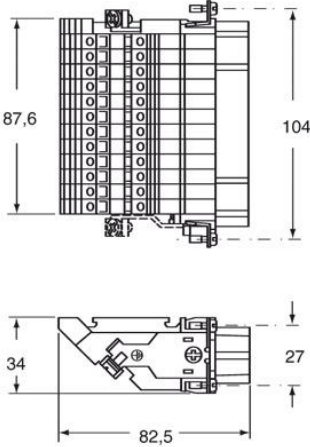

Catalogue drawings

