

Part number

CKSHF 04



Female insert, CKSH series, SQUICH® spring terminal connection without tools, 4 poles + PE, 10 A 400 V 4 kV 3, size "21.21"


Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CKSH	Other materials	Contacts: copper alloy
Connection type	SQUICH® spring terminal connection without tools	Colour	RAL 7032 grey
Gender	Female	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	4 poles + 	China RoHs - EFUP	50
Size	Size "21.21"	REACH SVHC substances	Yes Lead
Technical data		Approvals / Standards	
Current	10 A	Certifications	DNV, BV, EAC,CQC
Voltage	400 V	UL	ECBT2
Rated impulse withstand voltage	4 kV	cUL	ECBT8
Pollution degree	3	General ordering information	
Rated voltage according to UL/CSA	600 V	EAN13 code	8015747234610
Wire cross-section	0,14 mm² - 2,50 mm²	eCl@ss 8.1	27440205
AWG size	26 - 14	ETIM 7.0	EC000438
Contact type	Turned silver plated	Packaging Information	
IP degree of protection	IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure	Packaging length	200,00 mm
Further technical details		Packaging height	245,00 mm
Characteristics according to EN 61984	10A 400V 4kV 3; 10A 690V 4kV 2	Packaging width	146,00 mm
Mating cycles	≥ 500	Packaging weight	3,70 kg
Insulation resistance	≥ 10 GΩ	Packaging volume	7,15 dm³
Contact resistance	≤ 3 mΩ	Packaging description	Carton box
Weight	17,00 g	Packaging quantity	200 Pcs
Operating temperature range (min, max)	-40 °C ... +125 °C	Packaging EAN code	8015747234672
Conductors stripping length	9...11 mm	Sub-packaging length	116,00 mm
UL 94 flammability rating	V-0	Sub-packaging height	43,00 mm
Tightening torque for fixing screws	M3: 0,5 Nm; 4,4 lb.in (Ph1 or 0,8 x 5,5 mm)	Sub-packaging width	180,00 mm
		Sub-packaging weight	0,74 kg
		Sub-packaging volume	0,90 dm³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	40 Pcs
		Sub-packaging EAN barcode	8015747234689

Part number

CKSHF 04



Catalogue drawings

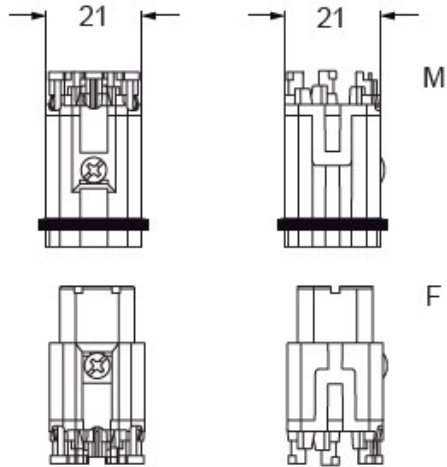

contacts side (front view)



Derating curves

CKSH 04 poles connector inserts
Maximum current load derating diagram

