

Part number

# SQE 1643



Interlocked switched socket-outlet, SQE series, 2 poles + PE, 4 h (yellow), 16 A, 100 ÷ 130 V, without fuse-carrier


| Product description                     |                                                                                             | Material properties          |                                                                                |
|-----------------------------------------|---------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                          | Colour                       | RAL 7035 grey, RAL 1021 yellow                                                 |
| Series                                  | SQE                                                                                         | RoHs conformity              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles                             | 2 poles +  | China RoHs - EFUP            | 50                                                                             |
| Clock position                          | 4                                                                                           | REACH SVHC substances        | Yes                                                                            |
| Size                                    | Socket fixing centre distance 88 x 230 mm                                                   | Lead                         |                                                                                |
| Specification                           | Without fuse-carrier                                                                        | SCIP number                  | Ce861c8d-b979-403b-96d9-80aef6dc281d                                           |
| Technical data                          |                                                                                             | Approvals / Standards        |                                                                                |
| Current                                 | 16 A                                                                                        | Reference standard           | EN 60309-1, -2 e -4                                                            |
| Voltage                                 | 100 ÷ 130 V                                                                                 | General ordering information |                                                                                |
| IP degree of protection                 | IP44                                                                                        | EAN13 code                   | 8015747085373                                                                  |
| Further technical details               |                                                                                             | Packaging Information        |                                                                                |
| Weight                                  | 467,50 g                                                                                    | Sub-packaging length         | 116,00 mm                                                                      |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                             | Sub-packaging height         | 103,00 mm                                                                      |
| IK rating (impact degree of protection) | IK08                                                                                        | Sub-packaging width          | 230,00 mm                                                                      |
|                                         |                                                                                             | Sub-packaging weight         | 0,47 kg                                                                        |
|                                         |                                                                                             | Sub-packaging volume         | 2,75 dm³                                                                       |
|                                         |                                                                                             | Sub-packaging description    | Carton box                                                                     |
|                                         |                                                                                             | Sub-packaging quantity       | 1 Pcs                                                                          |
|                                         |                                                                                             | Sub-packaging EAN barcode    | 8015747085380                                                                  |

Part number

**SQE 1643**



Catalogue drawings

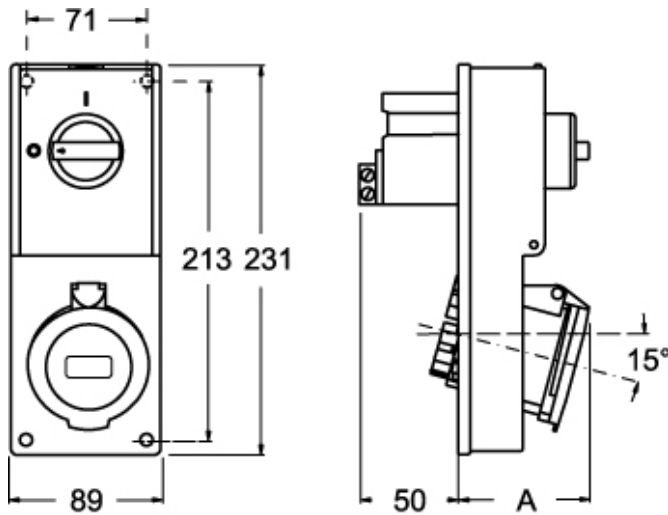

| SQE |        | A  |
|-----|--------|----|
| 16A | 2P+⊕   | 64 |
|     | 3P+⊕   | 65 |
|     | 3P+N+⊕ | 67 |

Catalogue drawings

