



Part number

CTM 16 R

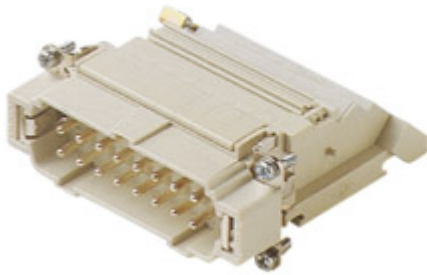

Male insert, CT series, screw terminal connection, 16 poles + PE, 16 A 230/400 V 4 kV 2, size "77.27", with incorporated terminal block, right side mounting







Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CT	Other materials	Contacts: copper alloy
Connection type	Screw terminal connection	Colour	RAL 7032 grey
Gender	Male	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	16 poles + 	China RoHs - EFUP	50
Size	Size 77.27	REACH SVHC substances	Yes Lead
Specification	Right side mounting With incorporated terminal block	SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Technical data		Approvals / Standards	
Current	16 A	Reference standard	EN 61984:2009-06
Voltage	230 - 400 V	Certifications	CSA, CQC, DNV, BV, EAC
Rated impulse withstand voltage	4 kV	UL	ECBT2
Pollution degree	2	General ordering information	
Rated voltage according to UL/CSA	600 V	EAN13 code	8015747041225
Wire cross-section	0,75 mm ² - 2,50 mm ²	eCl@ss 8.1	27440205
AWG size	18 - 14	ETIM 7.0	EC000438
Contact type	Turned silver plated	Packaging Information	
IP degree of protection	IP20 without enclosure, IP66/IP69 with enclosure	Packaging weight	0,70 kg
Further technical details		Packaging description	Carton box
Characteristics according to EN 61984	10A 230/400V 4kV 3; 10A 400V 4kV 2	Packaging quantity	4 Pcs
Mating cycles	≥ 500	Packaging EAN code	8015747041232
Insulation resistance	≥ 10 GΩ	Sub-packaging length	145,00 mm
Contact resistance	≤ 4 mΩ	Sub-packaging height	89,00 mm
Weight	170,00 g	Sub-packaging width	90,00 mm
Operating temperature range (min, max)	-40 °C ... +125 °C	Sub-packaging weight	0,18 kg
Conductors stripping length	12 mm	Sub-packaging volume	1,16 dm ³
UL 94 flammability rating	V-0	Sub-packaging description	Plastic packaging
Torque for main contact	M2,6: 0,4 Nm; 3,5 lb.in (0,5 x 3 mm)	Sub-packaging quantity	1 Pcs
Tightening torque for PE connection	M4: 1,2 Nm, 10,6 lb.in (Ph2 or 1,0x5,5mm)	Sub-packaging EAN barcode	8015747041249
Tightening torque for fixing screws	M3: 0.5 Nm; 4.4 lb.in (Ph1 or 0.8x4 mm)		

Part number

CTM 16 R



Catalogue drawings



Notes


CTF/M 16 L/R inserts

- characteristics according to EN 61984:
16A 400V 4kV 2
 - can be mated with CNE, CCE, CCS, CSE, CSH inserts
 - inserts may be fitted both from the front or the rear of enclosure
 - insulation resistance: > 10 GOhm
 - ambient temperature limit: -40 °C ... +125 °C
 - are made of self-extinguishing thermoplastic resin UL 94 V0
 - mechanical life: > 500 cycles
 - contact resistance: < 4 mOhm
 - conductors stripping length: 12 mm
 - terminal screw torque: 0.4 Nm
 - enclosures (only bulkhead mounted housing): size 77.27:
- C-TYPE IP65/IP66
C7 IP67 stainless steel lever
V-TYPE IP65/IP66 stainless steel lever
T-TYPE IP65 insulating
JEI zinc-plated steel lever
BIG hoods
W-TYPE aggressive environments

EMC

Dimensions shown in mm are not binding and may be changed without notice.

CT ... : for non-prepared conductors

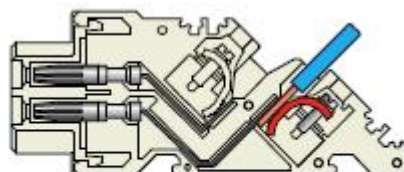

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
