


Part number

CX 01 30AM

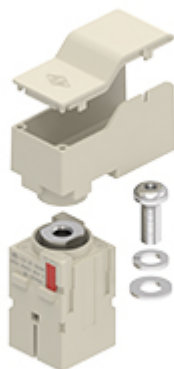

Male modular insert, Mixo series, screw terminal connections - 90° angled for cable lug, 1 pole, 2 modules, 300 A 1000 V 8 kV 3


Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate
Series	Mixo	Other materials	Contacts: copper alloy
Connection type	Screw terminal connection	Colour	RAL 7032 grey
Gender	Male	RoHS conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	1 pole	China RoHS - EFUP	50
Size	2 modules	REACH SVHC substances	Yes Lead
Specification	For wire cross-section 16-120 mm ² Angled MIXO Module	General ordering information	
Technical data		EAN13 code	8015747289894
Current	300 A	eCl@ss 8.1	27440205
Voltage	1000 V	ETIM 7.0	EC000438
Rated impulse withstand voltage	8 kV	Packaging Information	
Pollution degree	3	Packaging length	225,00 mm
Rated voltage according to UL/CSA	600 V	Packaging height	130,00 mm
Contact type	Turned silver plated	Packaging width	150,00 mm
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Packaging weight	1,42 kg
Further technical details		Packaging volume	4,39 dm ³
Mating cycles	≥ 500	Packaging description	Carton box
Insulation resistance	≥ 10 GΩ	Packaging quantity	10 Pcs
Contact resistance	≤ 3 mΩ	Packaging EAN code	8015747290104
Weight	124,50 g	Sub-packaging weight	0,14 kg
Operating temperature range (min, max)	-40 °C ... +125 °C	Sub-packaging description	Plastic bag
UL 94 flammability rating	V-0	Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747290111

Part number

CX 01 30AM



Catalogue drawings

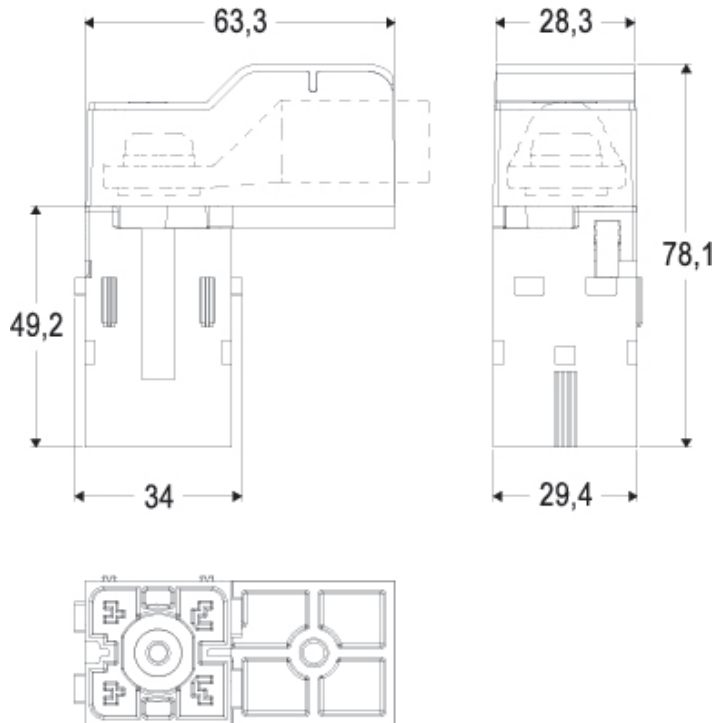

Notes

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.