


Part number

CX 01 30PEAM

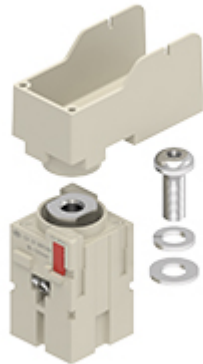

Male modular insert, Mixo series, screw terminal connections - 90° angled for cable lug, 1 pole, 2 modules, 300 A, PE module for earth termination

Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate
Series	Mixo	Other materials	Contacts: copper alloy
Connection type	Screw terminal connection	Colour	RAL 7032 grey
Gender	Male	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	1 PE pole		
Size	2 modules	China RoHs - EFUP	50
Specification	For wire cross-section 16-120 mm^2 PE angled MIXO Module	REACH SVHC substances	Yes Lead
		General ordering information	
Technical data		EAN13 code	8015747289917
Current	300 A	eCl@ss 8.1	27440205
Rated impulse withstand voltage	8 kV	ETIM 7.0	EC000438
Pollution degree	3	Packaging Information	
Contact type	Turned silver plated	Packaging weight	0,63 kg
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Packaging volume	1,24 dm³
Further technical details		Packaging description	Carton box
Mating cycles	≥ 500	Packaging quantity	5 Pcs
Contact resistance	≤ 3 mΩ	Packaging EAN code	8015747290142
Weight	114,50 g	Sub-packaging length	145,00 mm
Operating temperature range (min, max)	-40 °C ... +125 °C	Sub-packaging height	89,00 mm
UL 94 flammability rating	V-0	Sub-packaging width	120,00 mm
		Sub-packaging weight	0,13 kg
		Sub-packaging volume	1,55 dm³
		Sub-packaging description	Plastic bag
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747290159

Part number

CX 01 30PEAM



Catalogue drawings

