

Part number

CX 04 SCF



Female modular insert, Mixo Data series, fibre optic, 4 poles, 1 module, with ceramic sleeve


Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate (PC)
Series	Mixo Data	Colour	RAL 7032 grey
Connection type	Fibre optic	RoHs conformity	Compliant
Gender	Female	China RoHs - EFUP	E
N. of poles	4 seats for fibre optic SC contacts	REACH SVHC substances	No
Size	1 module	Approvals / Standards	
Specification	With ceramic sleeve SC fibre optic connector	Certifications	DNV, BV
Technical data		UL	ECBT2
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	cUL	ECBT8
Further technical details		General ordering information	
Mating cycles	≥ 500	EAN13 code	8015747190169
Insulation resistance	≥ 10 GΩ	eCl@ss 8.1	27440205
Weight	8,50 g	ETIM 7.0	EC000438
Operating temperature range (min, max)	-40°C ... +85°C	Packaging Information	
UL 94 flammability rating	V-0	Sub-packaging description	Plastic bag
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747190831

Part number

CX 04 SCF



Catalogue drawings

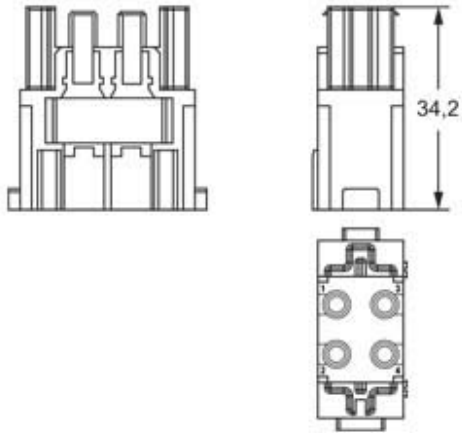

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.
