

Part number

PES 1663 SV



Mobile plug, PLUSO series, SQUICH® quick connection, 2 poles + PE, 6 h (blue), 16 A, 200 ÷ 250 V, straight


Product description		Material properties	
Product type	Plug Mobile	Colour	RAL 7035 grey, RAL 5015 blue
Series	PES....SV, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	SQUICH® quick connection	China RoHs - EFUP	50
N. of poles	2 poles + 	REACH SVHC substances	Yes Lead
Clock position	6	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Specification	Straight	Approvals / Standards	
Technical data		Reference standard	EN 60309-1 and -2
Current	16 A	General ordering information	
Voltage	200 ÷ 250 V	EAN13 code	8015747113090
IP degree of protection	IP44	Packaging Information	
Further technical details		Packaging length	400,00 mm
Weight	109,00 g	Packaging height	300,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging width	400,00 mm
		Packaging weight	11,00 kg
		Packaging volume	48,00 dm³
		Packaging description	Carton box
		Packaging quantity	100 Pcs
		Packaging EAN code	8015747128803

Part number

PES 1663 SV



Catalogue drawings

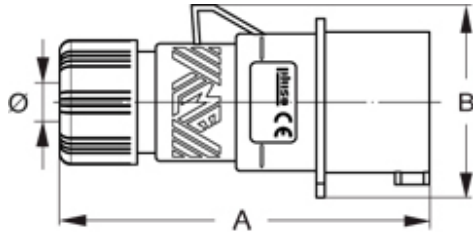

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PES...SV types (IP44), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure
- PESW...SV types (IP66/IP67), entry with cable gland colour coded according to the operating voltage, RAL 7035 grey enclosure, locking ring with gasket colour coded according to operating voltage
- Terminals with retained screws
- IP44 and IP66/IP67 degrees of protection (EN 60529)

